


Flanges & Fittings - Weld Fittings

304 & 316 Stainless Steel Tubing

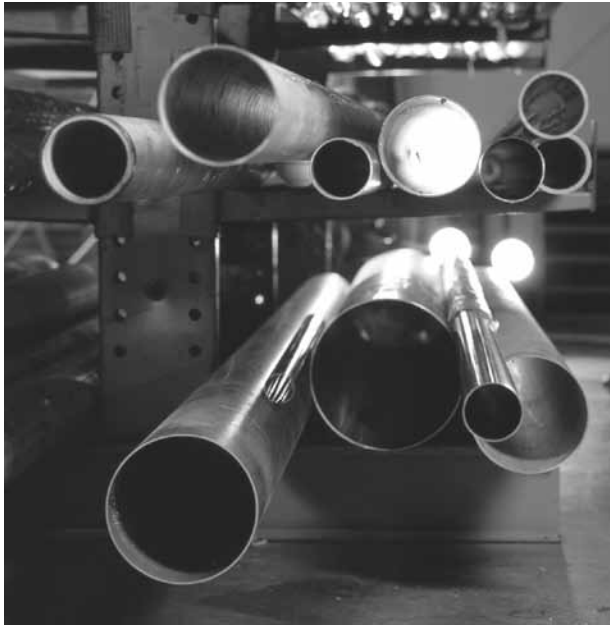

SPECIFICATIONS

Tube OD sizes: 1/2 to 12 inches

Materials: 304 or 316L stainless steel

Finishes: Bright Annealed, polished ID & OD & white pickled

Vacuum range: $\geq 1 \times 10^{-13}$ Torr

Temperature range: -200° to 450°C

304 & 316L Stainless Steel Tubing

MODEL NUMBER	SURFACE FINISH	TUBE OD	TUBE ID	WALL THICKNESS
SST-050	Bright annealed	1/2	0.402	0.049
SST-075	Bright annealed	3/4	0.680	0.035
SST-075-316L	Bright annealed	3/4	0.680	0.035
SST-100	Polished ID & OD	1	0.870	0.065
SST-100-316L	Bright annealed	1	0.870	0.065
SST-125	Bright annealed	1 1/4	1.120	0.065
SST-150	Polished ID & OD	1 1/2	1.370	0.065
SST-150-316L	Bright annealed	1 1/2	1.370	0.065
SST-162	Bright annealed	1 5/8	1.490	0.065
SST-175	Bright annealed	1 3/4	1.630	0.065
SST-200	Polished ID & OD	2	1.870	0.065
SST-200-316L	Bright annealed	2	1.870	0.065
SST-250	Polished ID & OD	2 1/2	2.370	0.065
SST-250-316L	Bright annealed	2 1/2	2.370	0.065
SST-300	Polished ID & OD	3	2.870	0.065
SST-300-316L	Bright annealed	3	2.870	0.065
SST-400	Polished ID & OD	4	3.834	0.083
SST-400-316L	Bright annealed	4	3.834	0.083
SST-500	White pickled	5	4.834	0.083
SST-600	White pickled	6	5.834	0.083
SST-800	White pickled	8	7.760	0.120
SST-1000	White pickled	10	9.760	0.120
SST-1200	White pickled	12	11.760	0.120

* Cutting fee applies, call for pricing. To order specify length required in feet as follows:
 SST-400-20.0 (20" length of 4" OD tube) SST-150-316L-20.0 (20" length of 1.5" OD tube)

REV 6/16

Call toll free **800-824-4166** or 530-842-4457 • FAX 530-842-9130

Visit our Web Site www.n-c.com

