

# Glass level gauges

## Model LGG


KSR data sheet LM 33.01

### Applications

- Continuous level indication without auxiliary power
- Direct indication of the level
- Individual design and corrosion-resistant materials make the products suitable for a broad range of applications
- Chemical industry, petrochemical industry, oil and natural gas extraction (on- and offshore), shipbuilding, machine building, power generating equipment, power plants
- Oil and gas, heat transfer and refrigeration systems, plants for cryogenics

### Special features

- Process- and procedure-specific production
- Operating limits:
  - Operating temperature: -196 ... +374 °C (1) [-320.8 ... +705.2 °F]
  - Operating pressure: Vacuum to 250 bar [3,625.9 psi]
- Wide variety of different process connections and materials
- Illumination optional
- Heating and/or insulation optional

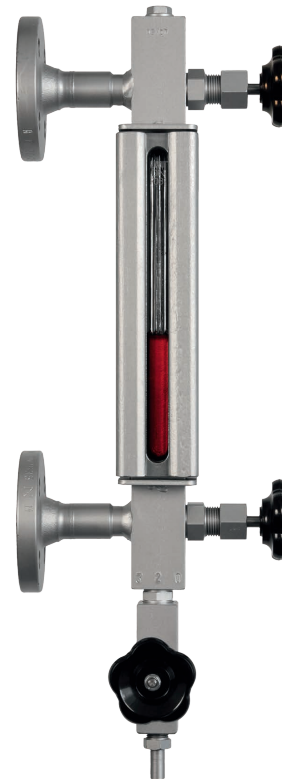

Compact version with side pieces, model LGG-E

### Description

The main element of the glass level gauge is the gauge body. Incorporated into this gauge body are the liquid channel (if necessary the heating channel) and the seating faces for the chambered seals and sight glasses.

Onto the gauge body are mounted, or are already integrated, the valve heads and process connections. Drain or vent are also possible.

The glasses and/or mica shields as well as the seals are fitted, secured and sealed with the aid of U-bolts and covers or pressure frames. Glasses from borosilicate glass in accordance with DIN 7081 are used.


For steam, the glasses can be used to 243 °C [469.4 °F], with mica design to 300 °C [572 °F]. For other media, temperatures to 300 °C are possible, in special cases to 374 °C [705.2 °F]. The use of mica is needed for specific applications.

## Functional principle

### Reflex glasses per DIN 7081


In the viewing direction, incident light strikes the reflective grooves of the sight glass plate and is refracted into the liquid present. With gases, the light is reflected. Thus the level is visible as a dark column, the gaseous area as a silvery column over it.

Reflex glasses are very well suited for the indication of clear liquids.

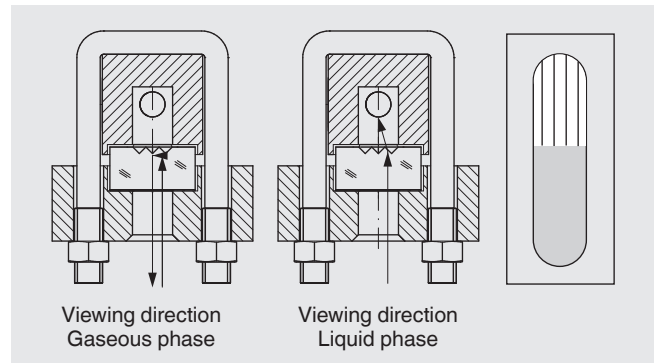


### Transparent glasses per DIN 7081

From the rear, incident light passes through both sight glass plates with the medium between them. The level is visible as a line (meniscus) or directly due to the liquid itself.

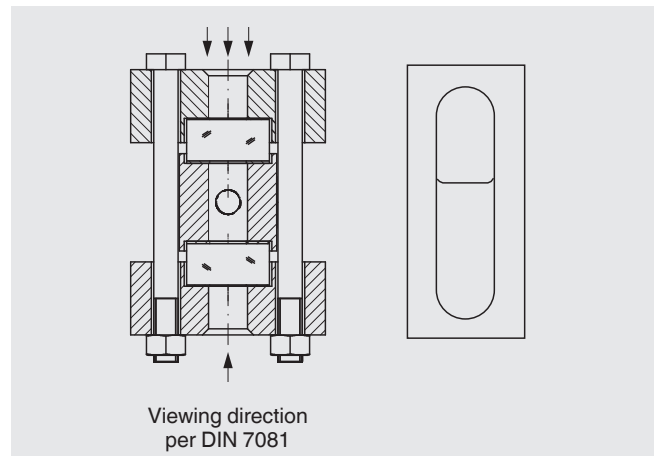

### Refraction principle with mica shields

From the rear, incident light from a lamp passes through both mica shields with the medium between them. The lamp and medium are arranged at an angle. In the gaseous phase, the light passes directly through, with liquid, the light is refracted sideways. Thus the level is visible as a black column, the gaseous area as a light column over it.

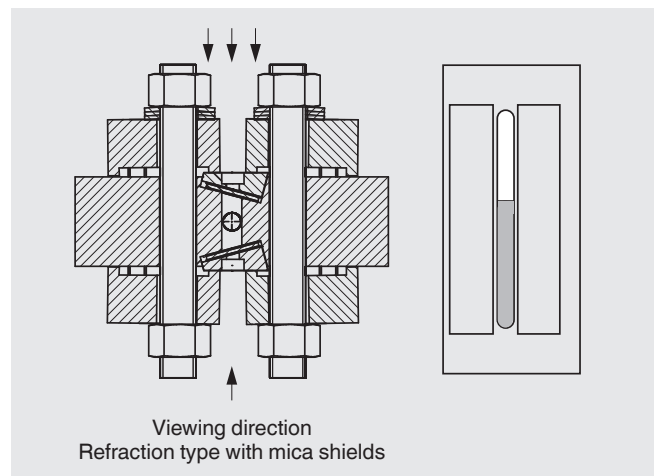

If unprotected sight glasses are used in boiler systems with aqueous media, high temperatures and high pH values can lead to increased glass erosion. The effect of glass corrosion is increased with the introduction of chemical additives, such as in water treatment. The geometric changes to the sight glass resulting from the erosion lead to risks in the operational safety.

For temperatures from 243 °C [469.4 °F], WIKA recommends the use of transparent glasses with mica design. These prevent chemical attack at high water temperatures on the otherwise unprotected glass.

## Construction of glass level gauges

### Gauge body

Base body of the glass level gauge, contains the liquid channel

### Cover

For the clamping of the sight glass plates

### Flat gasket

Chambered sealing between the liquid channel and the environment

### Glass

Sight glass plates per DIN 7081 from borosilicate glass

### Cushion

Mechanical protection between cover and glass

### U-bolt, nut

Hold the forces from the internal pressure

### Glass size

Standard lengths  $L$  of sight glass plates per DIN 7081, width 34 mm [1,34 in], thickness 17 mm [0,67 in]

### Visible length $SL$

The entire visible length in the sight glass, glass separations are included

### Individual visible length $ESL$

Visible range of a single segment



### Segment

Field of view consisting of a single sight glass plate

### Glass separation $A$

Non-visible range, results from the linking together of segments

### Example

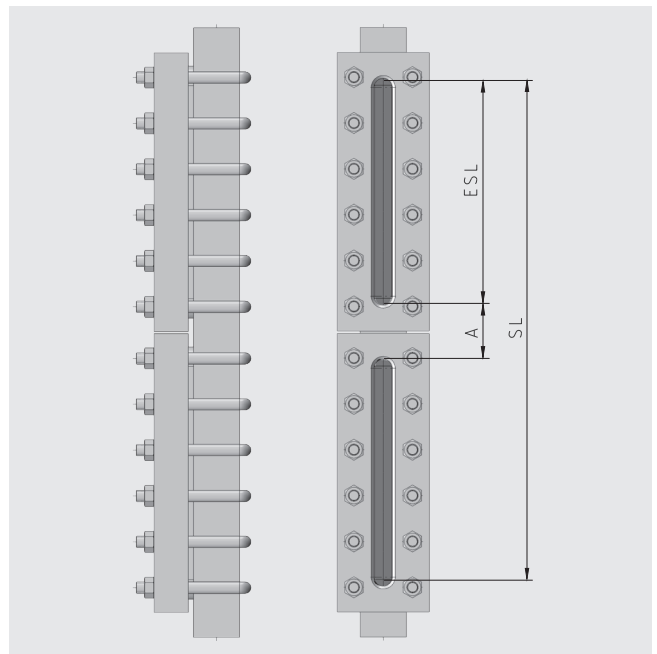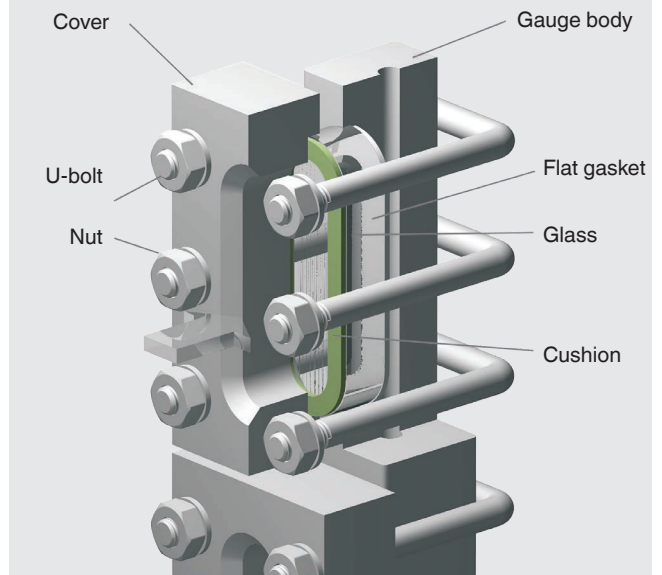

## Glass sizes and visible lengths

Length in mm [in]	Glass size									
	2	3	4	5	6	7	8	9	10	11
<b>L</b>	140 [5.5]	165 [6.5]	190 [7.5]	220 [8.7]	250 [9.8]	280 [11.0]	320 [12.6]	340 [13.4]	370 [14.6]	400 [15.7]
<b>ESL</b>	120 [4.7]	145 [5.7]	170 [6.7]	200 [7.9]	230 [9.1]	260 [10.2]	300 [11.8]	320 [12.6]	350 [13.8]	380 [15.0]



Number of segments	Visible length SL in mm [in]									
	2	3	4	5	6	7	8	9	10	11
<b>1</b>	120 [4.7]	145 [5.7]	170 [6.7]	200 [7.9]	230 [9.1]	260 [10.2]	300 [11.8]	320 [12.6]	350 [13.8]	380 [15.0]
<b>2</b>	285 [11.2]	335 [13.2]	385 [15.2]	445 [17.5]	505 [19.9]	565 [22.2]	645 [25.4]	685 [27.0]	745 [29.3]	805 [31.7]
<b>3</b>	450 [17.7]	525 [20.7]	600 [23.6]	690 [27.2]	780 [30.7]	870 [34.3]	990 [39.0]	1,050 [41.3]	1,140 [44.9]	1,230 [48.4]
<b>4</b>	615 [24.2]	715 [28.1]	815 [32.1]	935 [36.8]	1,055 [41.5]	1,175 [46.3]	1,335 [52.6]	1,415 [55.7]	1,535 [60.4]	1,655 [65.2]
<b>5</b>	780 [30.7]	905 [35.6]	1,030 [40.6]	1,180 [46.5]	1,330 [52.4]	1,480 [58.3]	1,680 [66.1]	1,780 [70.1]	1,930 [76.0]	2,080 [81.9]
<b>6</b>	945 [37.2]	1,095 [43.1]	1,245 [49.0]	1,425 [56.1]	1,605 [63.2]	1,785 [70.3]	2,025 [79.7]	2,145 [84.4]	2,325 [91.5]	2,505 [98.6]
<b>7</b>	1,110 [43.7]	1,285 [50.6]	1,460 [57.5]	1,670 [65.7]	1,880 [74.0]	2,090 [82.3]	2,370 [93.3]	2,510 [98.8]	2,720 [107.1]	2,930 [115.4]

Matrix valid for glass separation A = 45 mm [1.77 in]

The visible length SL can deviate from the specified value by  $\pm 3$  mm [ $\pm 0.12$  in] due to construction.


## Valve heads

Valve heads isolate the vessel from the glass level gauge. They consist of the valve body and the head piece. They are actuated by a valve with quick closing lever or handwheel. In general, they are fitted with a ball-check valve as a safety element.

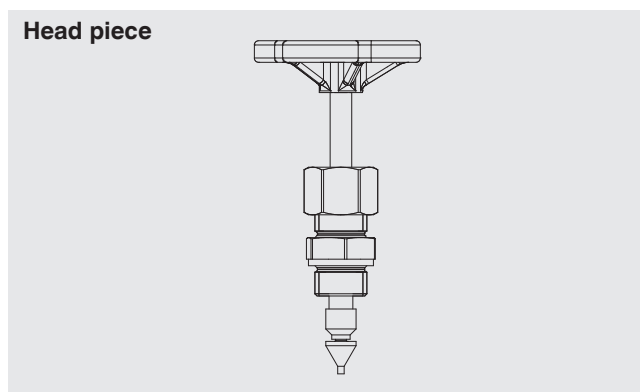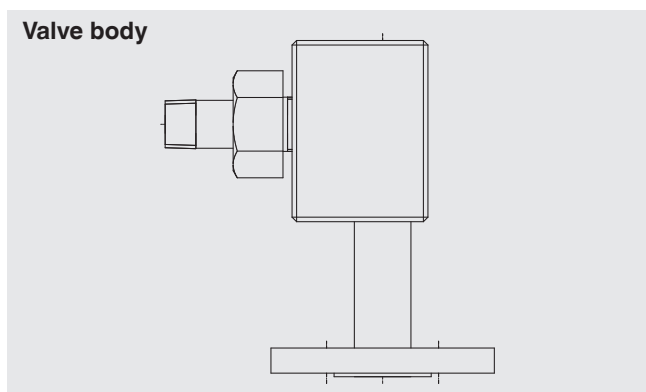


### Valve with quick closing lever

Open anticlockwise

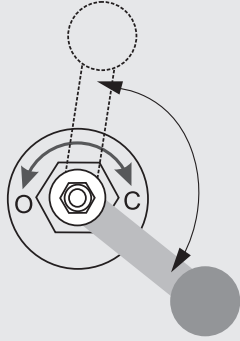

### Valve with handwheel

Open anticlockwise

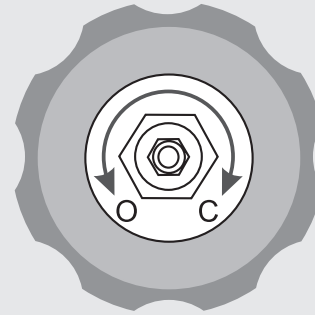


## Ball-check valve

The ball-check valve should prevent any major spillage from the glass level gauge in the event of any glass or mica breakage or other sizable leakage. For this purpose there is, under the valve seat, a ball within a recess. As soon as the indicator starts to leak, the incipient flow lifts the ball from the recess


and forces it against the valve seat (pressure > 0.5 bar [7.25 psi]). In this way, the flow is sharply reduced. The closing of the valve presses the ball back into its starting position.

### Illustration of the ball-check valve principle


Situation in normal operation

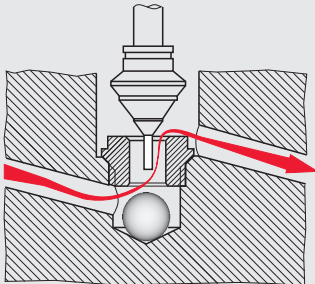

Ball-check valve on glass break

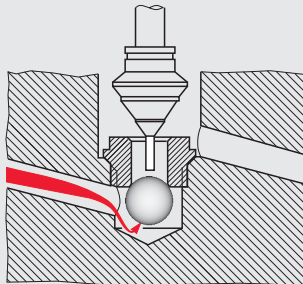

Situation during commissioning

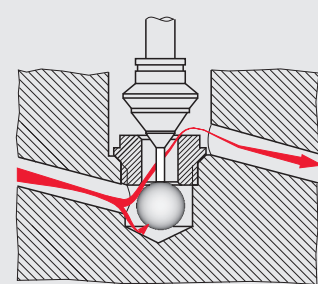

## Model overview

Glass level gauges	Material	Indication	Max. pressure in bar [psi]	Temperature range in °C [°F]	Glass size in mm	Number of segments
<b>Reflex indicator</b>						
"Carbon-Line" version, model LGG-RP	Steel A350LF2	Sight glass	100 [1,450.4]	-40 ... +300 [-40 ... +572]	4 ... 9	1 ... 5
Compact version with side pieces, model LGG-E	Steel 1.0460/1.0570	Sight glass	40 [580.2]	-10 ... +300 [+14 ... +572]	2 ... 11	1 ... 3
Standard version, model LGG-RE	Steel 1.0570 (A350LF2)	Sight glass	160 [2320.6]	-10 ... +300 [+14 ... +572]	2 ... 11	1 ... 5
	Stainless steel 1.4404 (316L)			-196 ... +300 [-320.8 ... +572]		
High-pressure version, model LGG-RI	Steel 1.5415 (15Mo3)	Sight glass	250 [3625.9]	-10 ... +100 [+14 ... +212]	2 ... 9	1 ... 5
	Stainless steel 1.4404 (316L)			-196 ... +100 [-320.8 ... +212]		
Weld-in version, model LGG-WR	Steel 1.0570 (A350LF2)	Sight glass	40 [580.2]	-10 ... +300 [+14 ... +572]	2 ... 9	1
	Stainless steel 1.4404 (316L)			-196 ... +300 [-320.8 ... +572]		
<b>Transparent indicator</b>						
"Carbon-Line" version, model LGG-TP	Steel A350LF2	Glass (mica)	100 [1,450.4]	-40 ... +300 [-40 ... +572]	4 ... 9	1 ... 5
Standard version, model LGG-TE	Steel 1.0570 (A350LF2)	Glass (mica)	160 [2320.6]	-10 ... +300 [+14 ... +572]	2 ... 11	1 ... 5
	Stainless steel 1.4404 (316L)			-196 ... +300 [-320.8 ... +572]		
High-pressure version, model LGG-TI	Steel 1.5415 (15Mo3)	Glass (mica)	250 [3625.9]	-10 ... +100 [+14 ... +212]	2 ... 9	1 ... 5
	Stainless steel 1.4404 (316L)			-196 ... +100 [-320.8 ... +212]		
Superheated steam version, model LGG-T3	Steel 1.5415 (15Mo3)	Glass + mica	160 [2320.6]	-10 ... +100 [+14 ... +212]	2 ... 9	1 ... 5
	Stainless steel 1.4404 (316L)			-196 ... +300 [-320.8 ... +572]		
Weld-in version, model LGG-WT	Steel 1.0570 (A350LF2)	Glass (mica)	40 [580.2]	-10 ... +300 [+14 ... +572]	2 ... 9	1
	Stainless steel 1.4404 (316L)			-196 ... +300 [-320.8 ... +572]		
Glass tube, standard, Model LGG-GA	Brass	Glass tube 13 mm [0.51 in]	10 [145]	-10 ... +120 [+14 ... +248]	110 ... 1,200 mm [4.3 ... 47.2 in]	1
	Stainless steel 1.4571 (316Ti)			-10 ... +200 [+14 ... +392]		
Glass tube, for large lengths with interposing glass-holder, model LGG-GB	Stainless steel 1.4404 (316L)	Glass tube 16 mm [0.63 in]	25 [362.6]	-10 ... +200 [+14 ... +392]	150 ... 4,500 mm [5.9 ... 177.2 in]	1 ... 3
<b>Refraction indicator</b>						
Highest-pressure version, model LGG-M	Steel 1.5415 (15Mo3)	Mica	160/250 [2320.6/3625.9]	-10 ... +374 [+14 ... +705.2]	2 ... 11	1 ... 9

**Examples**


Model LGG-RP



Model LGG-E



Model LGG-TE

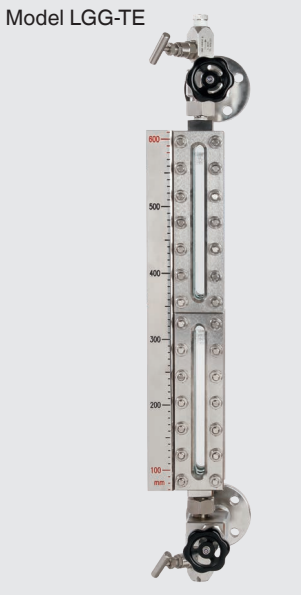

Model LGG-RI



## Model overview of valve heads

Valve head	Material		Max. pressure in bar	Operation	Ball-check valve	Mount	Thru-way
	Valve body	Head piece					
Glass tube fitting with handwheel, model LGV-01	Stainless steel	Stainless steel	PN 250	Handwheel	Yes	Top, bottom	Offset
Glass tube fitting with quick closing lever, model LGV-03	Stainless steel	Stainless steel	PN 100	Quick closing lever	Yes	Top, bottom	Offset
Compact glass tube fitting without valve, model LGV-04	Stainless steel	Stainless steel	PN 10	Without	No	Top, bottom	Angled
Glass tube fitting compact with handwheel, model LGV-05	<ul style="list-style-type: none"> <li>■ Brass</li> <li>■ Stainless steel</li> </ul>	Without	PN 10	Handwheel	No	Top, bottom	Angled
Double valve, model LGV-18	Steel 15Mo3	Stainless steel	PN 160	Double handwheel/double lever	Yes	Lateral	Angled
Double valve, high pressure, model LGV-19	Steel 15Mo3	Stainless steel	PN 250	Double handwheel/double lever	Yes	Lateral	Angled
Forged valve with handwheel, model LGV-33	Steel A350LF2, nitrocarburised	Stainless steel	PN 250	Handwheel	Yes	Top, bottom	Offset
Straight valve with handwheel, model LGV-51, LGV-71	<ul style="list-style-type: none"> <li>■ Steel</li> <li>■ Stainless steel</li> </ul>	Stainless steel	PN 250	Handwheel	Yes	Lateral, back	Straight
Angled valve with handwheel, model LGV-52, LGV-72	<ul style="list-style-type: none"> <li>■ Steel</li> <li>■ Stainless steel</li> </ul>	Stainless steel	PN 250	Handwheel	Yes	Lateral	Angled
Offset valve with handwheel, model LGV-53, LGV-73	<ul style="list-style-type: none"> <li>■ Steel</li> <li>■ Stainless steel</li> </ul>	Stainless steel	PN 250	Handwheel	Yes	Top, bottom	Offset
Straight valve with quick closing lever, model LGV-56	<ul style="list-style-type: none"> <li>■ Steel</li> <li>■ Stainless steel</li> </ul>	Stainless steel	PN 100	Quick closing lever	Yes	Lateral, back	Straight
Angled valve with quick closing lever, model LGV-57	<ul style="list-style-type: none"> <li>■ Steel</li> <li>■ Stainless steel</li> </ul>	Stainless steel	PN 100	Quick closing lever	Yes	Lateral	Angled
Offset valve with quick closing lever, model LGV-58	<ul style="list-style-type: none"> <li>■ Steel</li> <li>■ Stainless steel</li> </ul>	Stainless steel	PN 100	Quick closing lever	Yes	Top, bottom	Offset

### Examples

Model LGV-33



Model LGV-57



Model LGV-51






# Valve head arrangement

The valve arrangement is always specified in relation to the viewing direction.


## Rotatable field of view

Offset valve  
Top and bottom mount

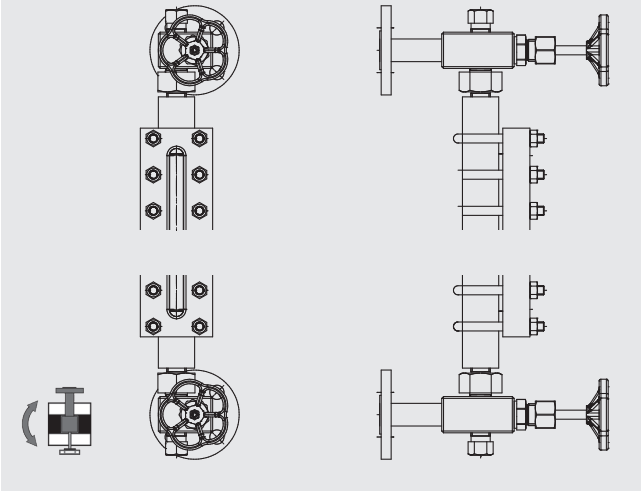


## Fixed field of view


Straight valve  
Left mount (lateral)

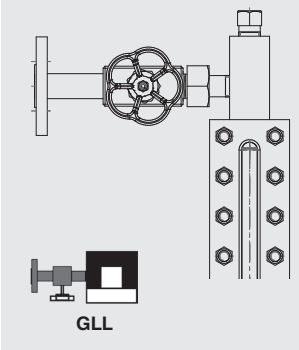


Straight valve  
Back mount, left-hand

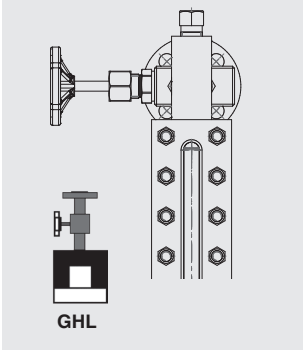


Straight valve  
Back mount, right-hand

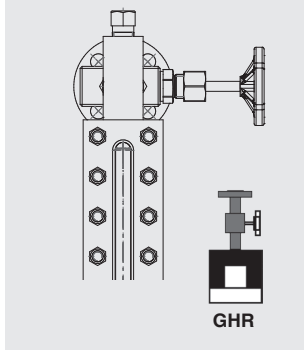


Straight valve  
Right mount (lateral)

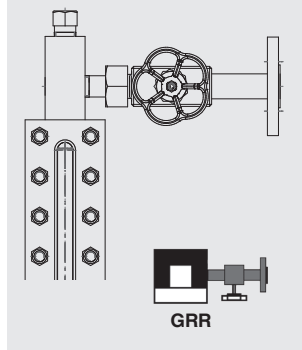


Angled valve  
Left mount (lateral)

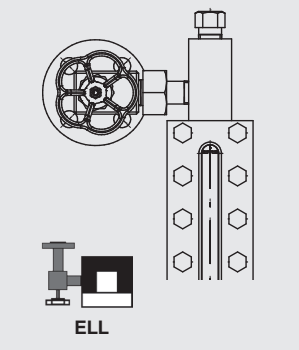


Angled valve  
Back mount, left-hand

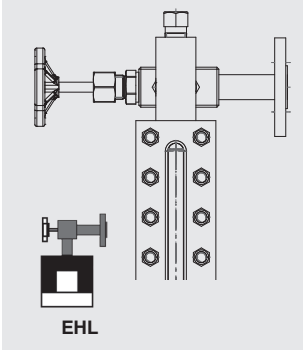


Angled valve  
Back mount, right-hand

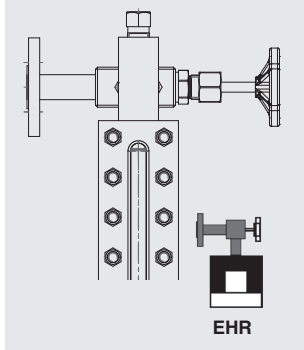


Angled valve  
Right mount (lateral)

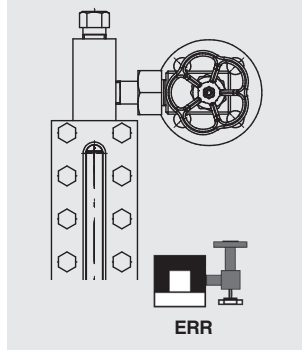

## Glass level gauge, reflex, "Carbon-Line" version Model LGG-RP

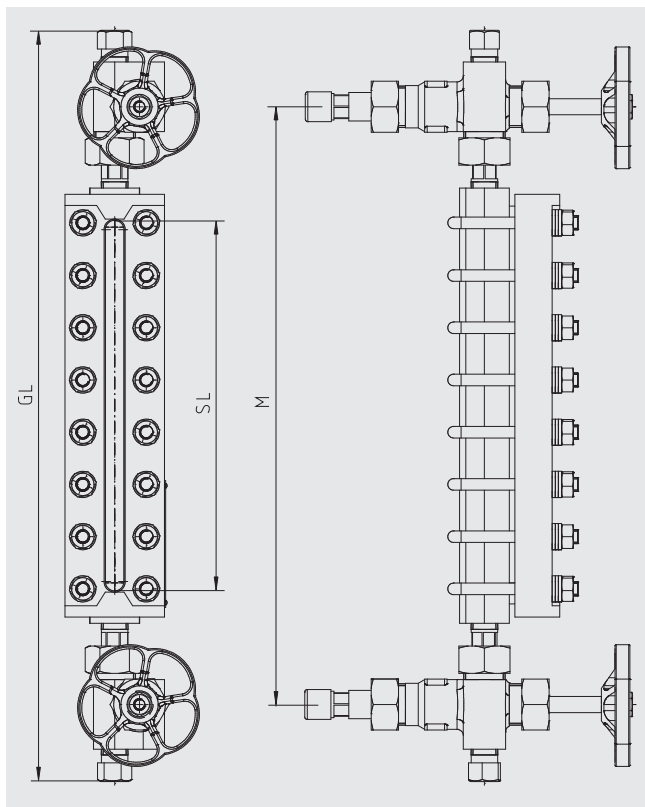


Valve arrangement



Specifications	
Material	Steel A350 LF2, nitrocarburised
Gauge body	40 x 40 mm [1.6 x 1.6 in]
Cover	80 x 30 mm [3.1 x 1.2 in]
Sight glass	Borosilicate, reflex per DIN 7081
Max. operating pressure	100 bar [1,450.4 psi] <sup>1)</sup>
Temperature range	-40 ... +243 °C [-40 ... +469.4 °F] (steam) -40 ... +300 °C [-40 ... +572 °F]
Process connections	<ul style="list-style-type: none"> <li>■ Male thread ½ NPT, ¾ NPT</li> <li>■ Weld stub ½", ¾"</li> <li>■ Flange DIN EN 1092-1: DN 15 ... 50, PN 16 ... 100</li> <li>■ Flange ASME 16.5: 1/2 ... 2", Class 150 ... 600</li> </ul>
Centre-to-centre distance M	Freely selectable, min. visible length SL + 180 mm [7 in]
Vent	Plug ½ NPT (option: Valve)
Drain	Plug ½ NPT (option: Valve)
Glass size	4 ... 9
Number of segments	1 ... 5
Suitable valve heads	
Handwheel	Model LGV-33 (PN 250)

1) Depending on the temperature, the material properties must be observed


# Glass level gauge, reflex, compact version with side pieces Model LGG-E

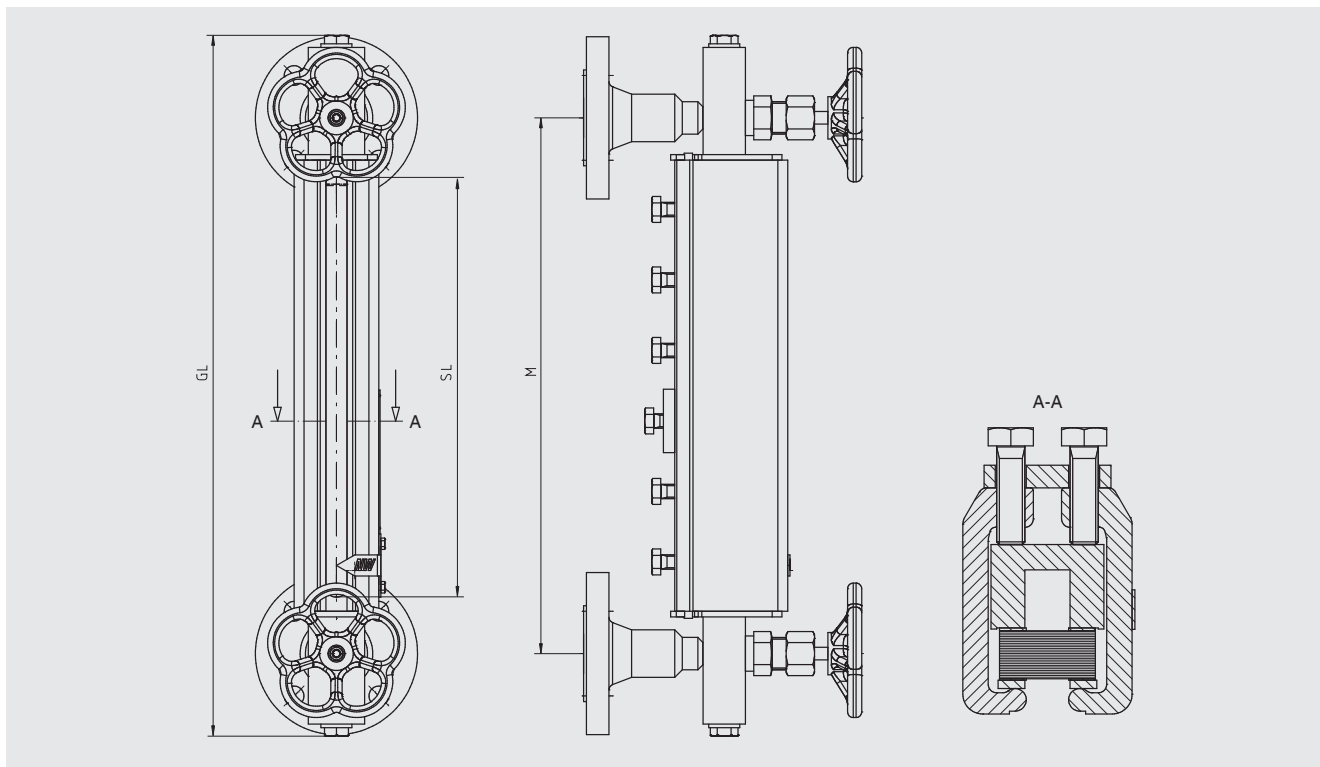

Specifications	
<b>Material</b>	Steel 1.0460, 1.0570
<b>Gauge body</b>	40 x 30 mm [1.6 x 1.2 in]
<b>Cover</b>	Clamping through side components, hinged
<b>Sight glass</b>	Borosilicate, reflex per DIN 7081
<b>Max. operating pressure</b>	40 bar [580.2 psi] <sup>1)</sup>
<b>Temperature range</b>	-10 ... +243 °C [+14 ... 469.4 °F] (steam)
<b>Process connections</b>	<ul style="list-style-type: none"> <li>■ Flange DIN EN 1092-1: DN 15 ... 50, PN 16 ... 40</li> <li>■ Flange ASME 16.5: ½ ... 2", Class 150 ... 300</li> </ul>
<b>Centre-to-centre distance M</b>	Freely selectable, min. visible length SL + 80 mm [3.1 in]
<b>Vent</b>	Plug G 3/8 (option: Valve, ball valve)
<b>Drain</b>	Plug G 3/8 (option: Valve, ball valve)
<b>Glass size</b>	2 ... 11
<b>Number of segments</b>	1 ... 3
<b>Suitable valve heads</b>	Integrated, with ball-check valve, mounting components from stainless steel

1) Depending on the temperature, the material properties must be observed


## Valve arrangement

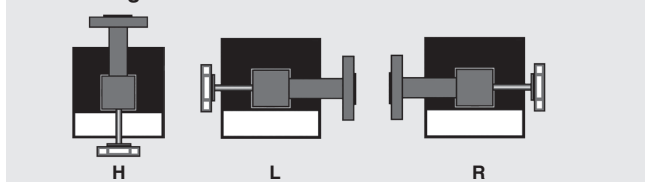


# Glass level gauge, reflex, standard version

## Model LGG-RE

Version with valve head, lateral, model LGV-52

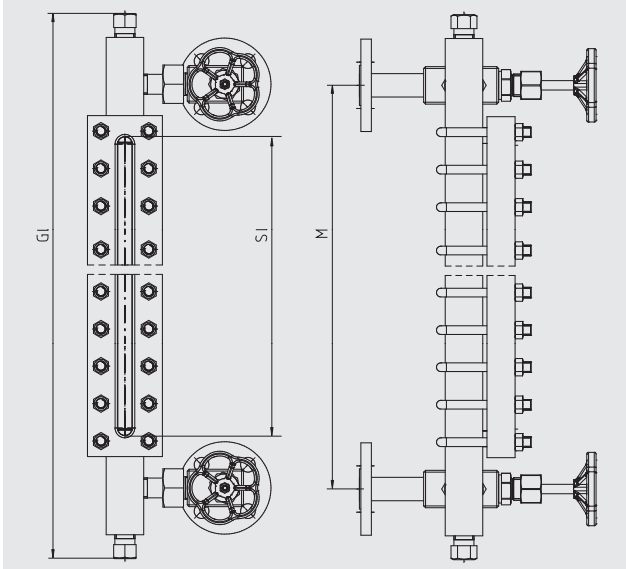

Version with valve head, top/bottom, model LGV-53

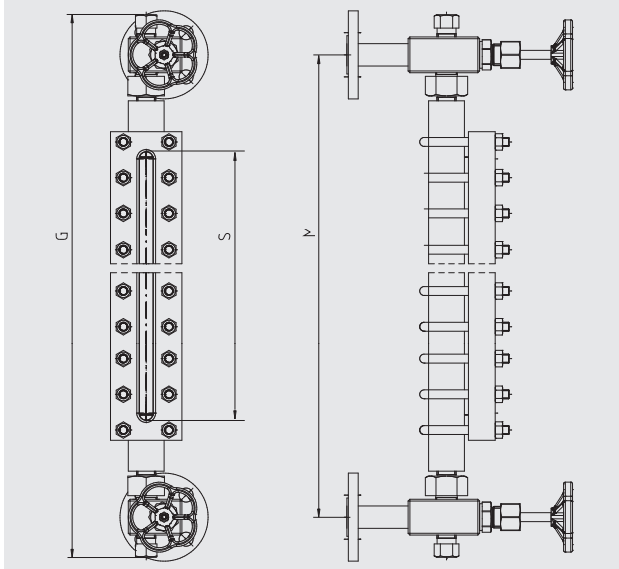


Specifications	Steel version	Stainless steel version
<b>Material</b>	Steel 1.0570, A350 LF2 Other materials on request	Stainless steel 1.4404 (316L)
<b>Gauge body</b>	40 x 40 mm [1.6 x 1.6 in], machined	
<b>Cover</b>	<ul style="list-style-type: none"> <li>■ 80 x 30 mm [3.1 x 1.2 in], (PN 40)</li> <li>■ 80 x 40 mm [3.1 x 1.6 in], (PN 100, PN 160)</li> </ul>	<ul style="list-style-type: none"> <li>■ 80 x 30 mm [3.1 x 1.2 in], (PN 40)</li> <li>■ 80 x 40 mm [3.1 x 1.6 in], (PN 100, PN 160)</li> </ul>
<b>Sight glass</b>	Borosilicate, reflex per DIN 7081	
<b>Max. operating pressure</b>	40 bar [580.2 psi], 100 bar [1,450.4 psi], 160 bar [2,320.6 psi] <sup>1)</sup>	
<b>Temperature range</b>	-10 ... +243 °C [+14 ... 469.4 °F] (steam) -10 ... +300 °C [+14 ... 572 °F]	-196 ... +243 °C [-320.8 ... +469.4 °F] (steam) -196 ... +300 °C [-320.8 ... +572 °F]
<b>Process connections</b>	<ul style="list-style-type: none"> <li>■ Male thread ½ NPT, ¾ NPT</li> <li>■ Weld stub ½", ¾"</li> <li>■ Flange DIN EN 1092-1: DN 15 ... 50, PN 16 ... 160</li> <li>■ Flange ASME 16.5: ½ ... 2", Class 150 ... 900</li> </ul>	
<b>Centre-to-centre distance M</b>	<ul style="list-style-type: none"> <li>■ Freely selectable, min. visible length SL + 180 mm [7 in] (with mounted valve heads model LGV-53, LGV-58, LGV-73)</li> <li>■ Freely selectable, min. visible length SL + 80 mm [3.1 in] (with mounted valve heads model LGV-51, -52, -56, -57, -71, -72)</li> <li>■ Special version, visible length = M (with mounted valve heads model LGV-51, -52, -56, -57, -71, -72)</li> </ul>	
<b>Vent</b>	Plug G ⅜ (option: Weld stub, flange, valve or ball valve)	
<b>Drain</b>	Plug G ⅜ (option: Weld stub, flange, valve or ball valve)	
<b>Glass size</b>	2 ... 11	
<b>Number of segments</b>	1 ... 5 (more on request)	
<b>Suitable valve heads</b>		
Handwheel	Model LGV-51, -52, -53, -71, -72, -73 (PN 250)	Model LGV-51, -52, -53, -71, -72, -73 (PN 250)
Quick closing lever	Model LGV-56, LGV-57, LGV-58 (PN 100)	Model LGV-56, LGV-57, LGV-58 (PN 100)


1) Depending on the temperature, the material properties must be observed

### Valve arrangement


Model LGV-51, LGV-56, LGV-71

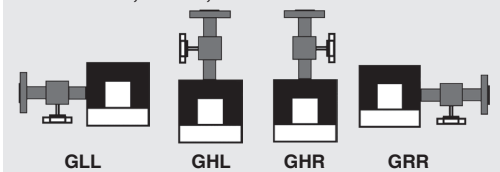

Model LGV-52, LGV-57, LGV-72

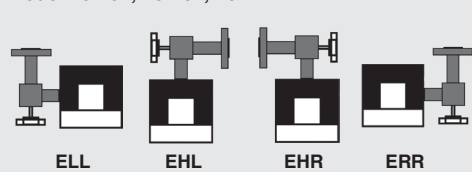


Model LGV-53, LGV-58, LGV-73

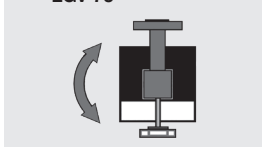


# Glass level gauge, reflex, high-pressure version Model LGG-RI

Version with valve head, lateral, model LGV-52

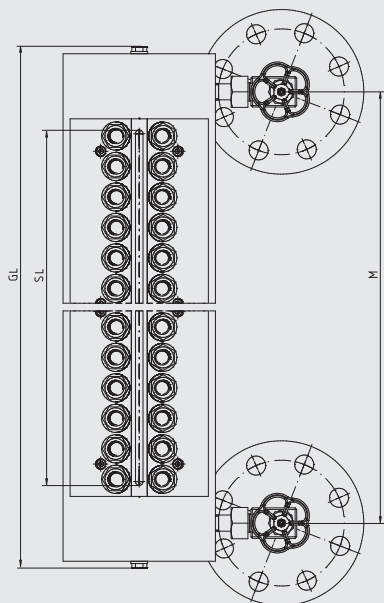

Version with valve head, top/bottom, model LGV-53

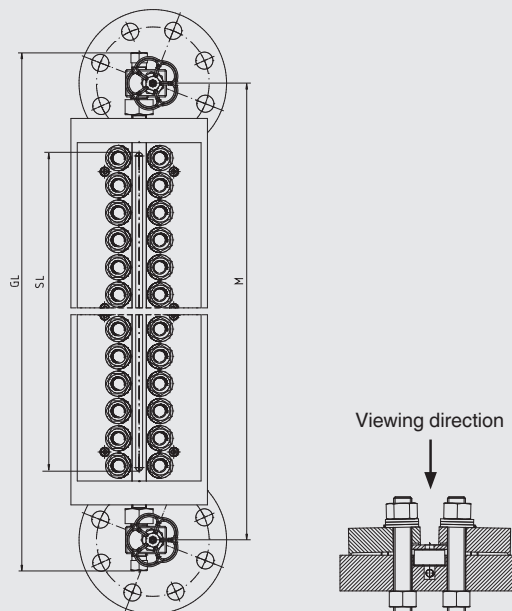


Specifications	Steel version	Stainless steel version
<b>Material</b>	Steel 1.5415 (15Mo3)	Stainless steel 1.4404 (316L)
	Other materials on request	
<b>Gauge body</b>	200 x 40 mm [5.5 x 1.6 in]	
<b>Cover</b>	Pressure frame	
<b>Sight glass</b>	Borosilicate, reflex per DIN 7081	
<b>Max. operating pressure</b>	250 bar [3625.9 psi] <sup>1)</sup>	
<b>Temperature range</b>	-10 ... +100 °C [+14 ... 212 °F]	-196 ... +100 °C [-320.8 ... +212 °F]
<b>Process connections</b>	<ul style="list-style-type: none"> <li>■ Male thread ½ NPT, ¾ NPT</li> <li>■ Weld stub ½", ¾"</li> <li>■ Flange DIN EN 1092-1: DN 15 ... 50, PN 16 ... 250</li> <li>■ Flange ASME 16.5: ½ ... 2", Class 150 ... 1,500</li> </ul>	
<b>Centre-to-centre distance M</b>	<ul style="list-style-type: none"> <li>■ Freely selectable, min. visible length SL + 180 mm [7 in] (with mounted valve head model LGV-53)</li> <li>■ Freely selectable, visible length SL ≤ M (with mounted valve heads model LGV-51, LGV-52)</li> </ul>	
<b>Vent</b>	Plug G ⅜ (option: Weld stub, flange, valve or ball valve)	
<b>Drain</b>	Plug G ⅜ (option: Weld stub, flange, valve or ball valve)	
<b>Glass size</b>	2 ... 9	
<b>Number of segments</b>	1 ... 5	
<b>Suitable valve heads</b>		
Handwheel	Model LGV-51, LGV-52, LGV-53	


1) Depending on the temperature, the material properties must be observed

## Valve arrangement


Model LGV-51

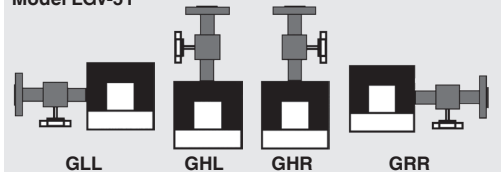


Model LGV-52

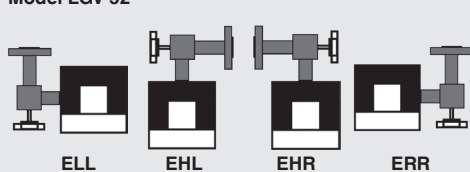

Model LGV-53

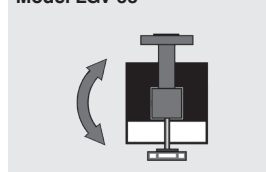


# Glass level gauge, reflex, weld-in version Model LGG-WR

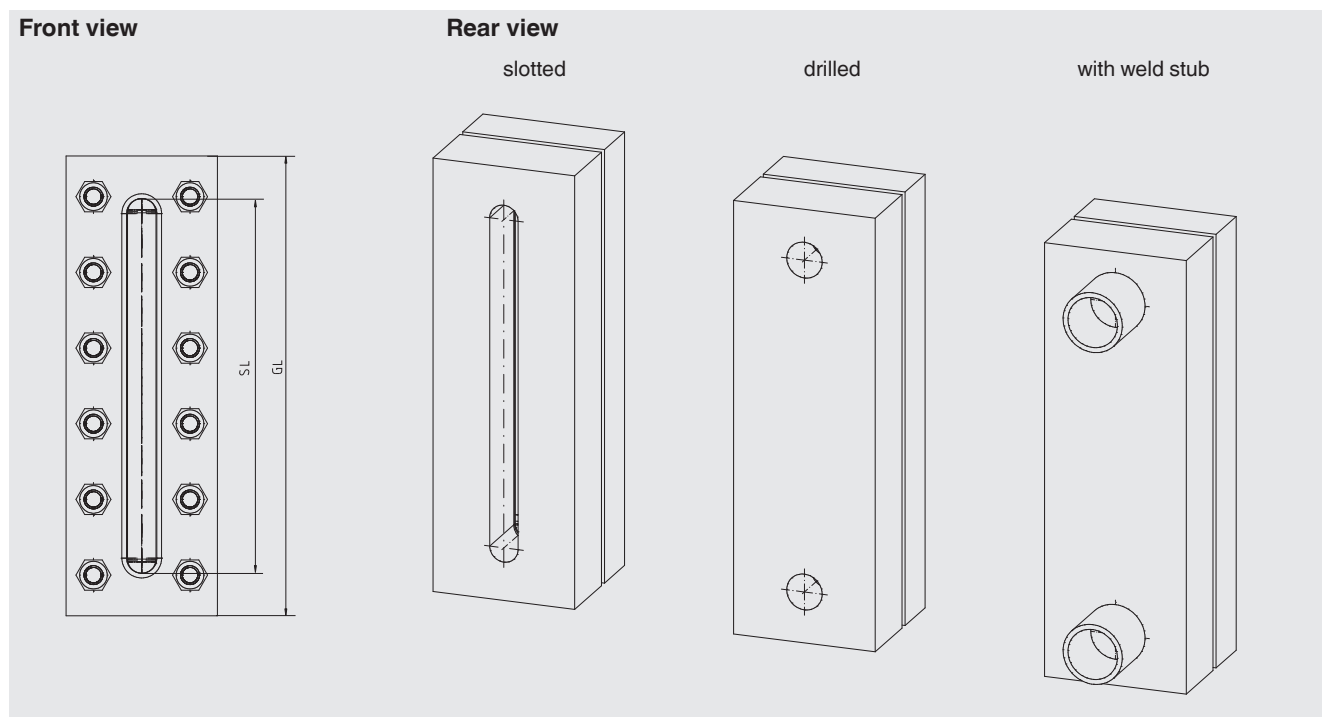

Specifications	Steel version	Stainless steel version
<b>Material</b>	Steel 1.0570	Stainless steel 1.4404 (316L)
	Other materials on request	
<b>Gauge body</b>	80 x 40 mm [3.1 x 1.6 in]	
<b>Cover</b>	80 x 30 mm [3.1 x 1.2 in]	80 x 30 mm [3.1 x 1.2 in]
<b>Sight glass</b>	Borosilicate, reflex per DIN 7081	
<b>Max. operating pressure</b>	40 bar [580.2 psi] <sup>1)</sup> (indicator must be included in the pressure test for the vessel)	
<b>Temperature range</b>	-10 ... +243 °C [+14 ... 469.4 °F] (steam)	-196 ... +243 °C [-320.8 ... +469.4 °F] (steam)
	-10 ... +300 °C [+14 ... 572 °F]	-196 ... +300 °C [-320.8 ... +572 °F]
<b>Overall length GL</b>	Visible length SL + 43 mm [1.7 in]	
<b>Glass size</b>	2 ... 9 (larger on request)	
<b>Number of segments</b>	1	

1) Depending on the temperature, the material properties must be observed

# Glass level gauge, transparent, "Carbon-Line" version Model LGG-TP

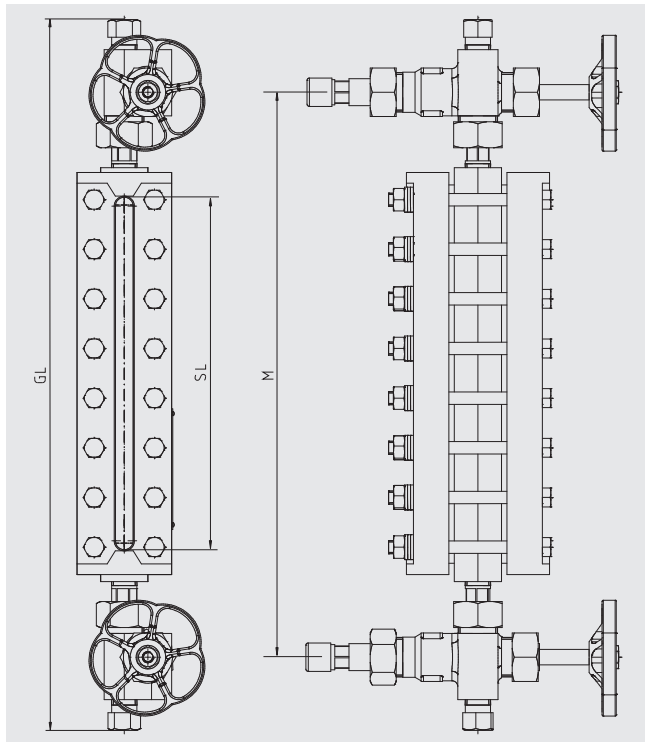


## Specifications

<b>Material</b>	Steel A350 LF2, nitrocarburised Other materials on request
<b>Gauge body</b>	40 x 40 mm [1.6 x 1.6 in]
<b>Cover</b>	80 x 34 mm [3.1 x 1.2 in]
<b>Sight glass</b>	Borosilicate, transparent per DIN 7081 (option: Mica design)
<b>Max. operating pressure</b>	100 bar [1,450.4 psi] <sup>1)</sup>
<b>Temperature range</b>	-40 ... +243 °C [-40 ... +469.4 °F] (steam, without mica design) -40 ... +300 °C [-40 ... +572 °F] (steam, with mica design) -40 ... +300 °C [-40 ... +572 °F]
<b>Process connections</b>	<ul style="list-style-type: none"> <li>■ Male thread ½ NPT, ¾ NPT</li> <li>■ Weld stub ½", ¾"</li> <li>■ Flange DIN EN 1092-1: DN 15 ... 50, PN 16 ... 100</li> <li>■ Flange ASME 16.5: ½ ... 2", Class 150 ... 600</li> </ul>
<b>Centre-to-centre distance M</b>	Freely selectable, min. visible length SL + 180 mm [7 in]
<b>Vent</b>	Plug ½ NPT (option: Valve)
<b>Drain</b>	Plug ½ NPT (option: Valve)
<b>Glass size</b>	4 ... 9
<b>Number of segments</b>	1 ... 5
<b>Suitable valve heads</b>	
Handwheel	Model LGV-33 (PN 250)

1) Depending on the temperature, the material properties must be observed


## Valve arrangement




# Glass level gauge, transparent, standard version

## Model LGG-TE

Version with valve head, lateral, model LGV-52

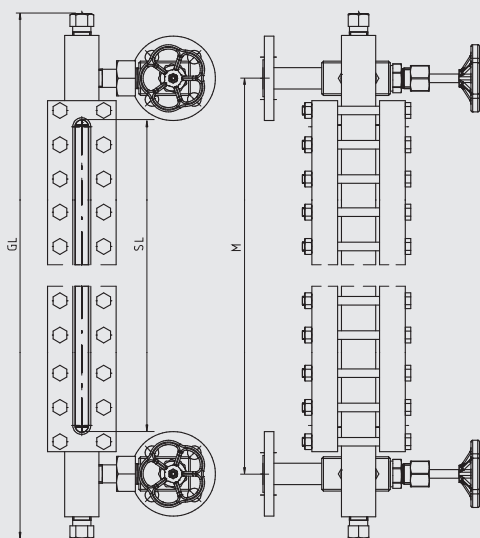

Version with valve head, top/bottom, model LGV-53

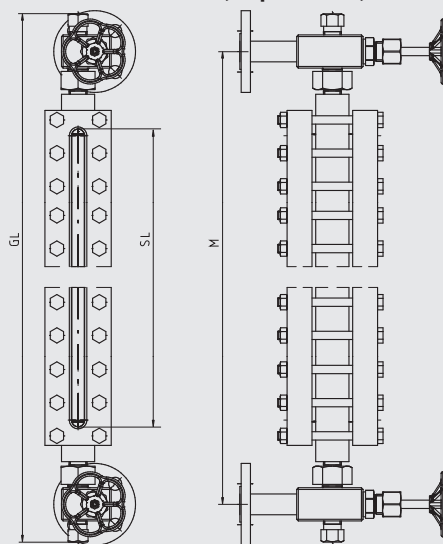


Specifications	Steel version	Stainless steel version
<b>Material</b>	Steel 1.0570, A350 LF2	Stainless steel 1.4404 (316L)
<b>Gauge body</b>	40 x 40 mm [1.6 x 1.6 in], machined	
<b>Cover</b>	<ul style="list-style-type: none"> <li>■ 80 x 30 mm [3.1 x 1.2 in], (PN 40)</li> <li>■ 80 x 40 mm [3.1 x 1.6 in], (PN 100, PN 160)</li> </ul>	<ul style="list-style-type: none"> <li>■ 80 x 30 mm [3.1 x 1.2 in], (PN 40)</li> <li>■ 80 x 40 mm [3.1 x 1.6 in], (PN 100, PN 160)</li> </ul>
<b>Sight glass</b>	Borosilicate, transparent per DIN 7081 (option: Mica design)	
<b>Max. operating pressure</b>	40 bar [580.2 psi], 100 bar [1,450.4 psi], 160 bar [2,320.6 psi] <sup>1)</sup>	
<b>Temperature range</b>	<ul style="list-style-type: none"> <li>-10 ... +243 °C [-14 ... +469.4 °F] <sup>2)</sup></li> <li>-10 ... +300 °C [-14 ... +572 °F] <sup>3)</sup></li> <li>-10 ... +300 °C [-14 ... +572 °F]</li> </ul>	<ul style="list-style-type: none"> <li>-196 ... +243 °C [-320.8 ... +469.4 °F] <sup>2)</sup></li> <li>-196 ... +300 °C [-320.8 ... +572 °F] <sup>3)</sup></li> <li>-196 ... +300 °C [-320.8 ... +572 °F]</li> </ul>
<b>Process connections</b>	<ul style="list-style-type: none"> <li>■ Male thread ½ NPT, ¾ NPT</li> <li>■ Weld stub ½", ¾"</li> <li>■ Flange DIN EN 1092-1: DN 15 ... 50, PN 16 ... 160</li> <li>■ Flange ASME 16.5: ½ ... 2", Class 150 ... 900</li> </ul>	
<b>Centre-to-centre distance M</b>	<ul style="list-style-type: none"> <li>■ Freely selectable, min. visible length SL + 180 mm [7 in] (with mounted valve heads model LGV-53, LGV-58, LGV-73)</li> <li>■ Freely selectable, min. visible length SL + 80 mm [3.1 in] (with mounted valve heads model LGV-51, -52, -56, -57, -71, -72)</li> <li>■ Special version, visible length = M (with mounted valve heads model LGV-51, -52, -56, -57, -71, -72)</li> </ul>	
<b>Vent</b>	Plug G ¾ (option: Weld stub, flange, valve or ball valve)	
<b>Drain</b>	Plug G ¾ (option: Weld stub, flange, valve or ball valve)	
<b>Glass size</b>	2 ... 11	
<b>Number of segments</b>	1 ... 5 (others on request)	
<b>Suitable valve heads</b>		
Handwheel	Model LGV-51, -52, -53, -71, -72, -73 (PN 250)	Model LGV-51, -52, -53, -71, -72, -73 (PN 250)
Quick closing lever	Model LGV-56, LGV-57, LGV-58 (PN 100)	Model LGV-56, LGV-57, LGV-58 (PN 100)


- 1) Depending on the temperature, the material properties must be observed
- 2) Steam, without mica design
- 3) Steam, with mica design

### Valve arrangement

Model LGV-51, LGV-56, LGV-71

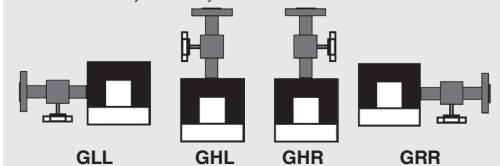

Model LGV-52, LGV-57, LGV-72


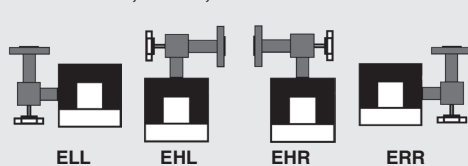


Model LGV-53, LGV-58, LGV-73








# Glass level gauge, transparent, high-pressure version Model LGG-TI

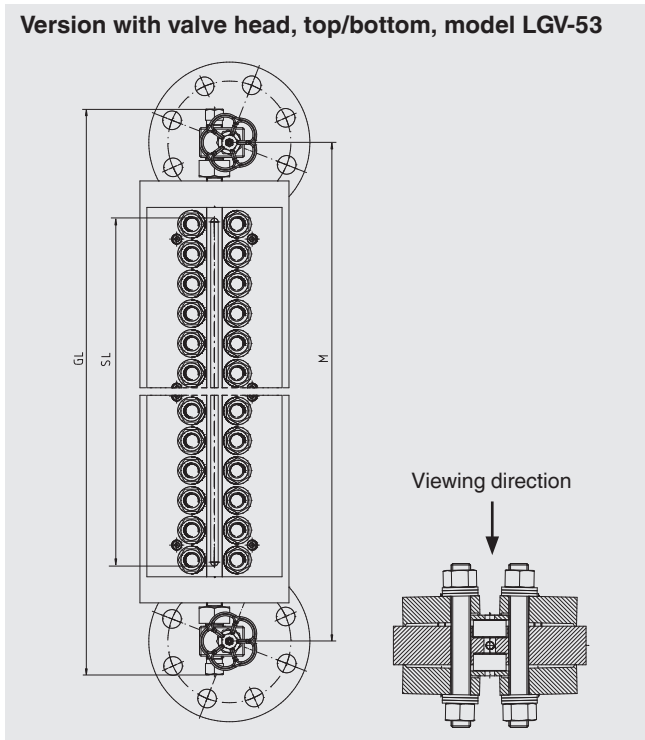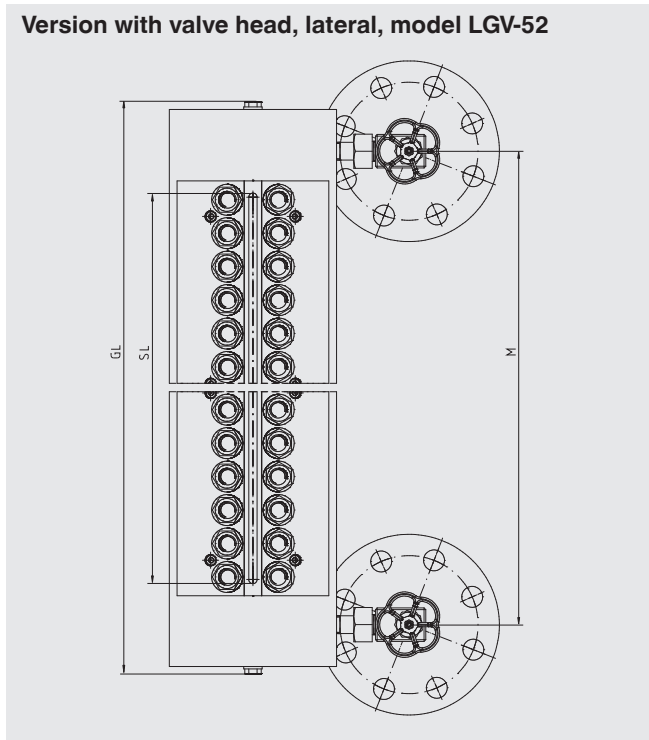


Specifications	Steel version	Stainless steel version
<b>Material</b>	Steel 1.5415 (15Mo3) Other materials on request	Stainless steel 1.4404 (316L)
<b>Gauge body</b>	200 x 40 mm [5.5 x 1.6 in]	
<b>Cover</b>	Pressure frame	
<b>Sight glass</b>	Borosilicate, transparent per DIN 7081	
<b>Max. operating pressure</b>	250 bar [3625.9 psi] <sup>1)</sup>	
<b>Temperature range</b>	-10 ... +100 °C [+14 ... 212 °F]	-196 ... +100 °C [-320.8 ... +212 °F]
<b>Process connections</b>	<ul style="list-style-type: none"> <li>■ Male thread ½ NPT, ¾ NPT</li> <li>■ Weld stub ½", ¾"</li> <li>■ Flange DIN EN 1092-1: DN 15 ... 50, PN 16 ... 250</li> <li>■ Flange ASME 16.5: ½ ... 2", Class 150 ... 1,500</li> </ul>	
<b>Centre-to-centre distance M</b>	<ul style="list-style-type: none"> <li>■ Freely selectable, min. visible length SL + 180 mm [7 in] (with mounted valve head model LGV-53)</li> <li>■ Freely selectable, visible length SL ≤ M (with mounted valve heads model LGV-51, LGV-52)</li> </ul>	
<b>Vent</b>	Plug G ¾ (option: Weld stub, flange, valve or ball valve)	
<b>Drain</b>	Plug G ¾ (option: Weld stub, flange, valve or ball valve)	
<b>Glass size</b>	2 ... 9	
<b>Number of segments</b>	1 ... 5	
<b>Suitable valve heads</b>		
Handwheel	Model LGV-51, LGV-52, LGV-53	

1) Depending on the temperature, the material properties must be observed

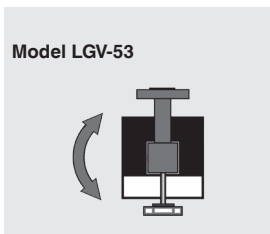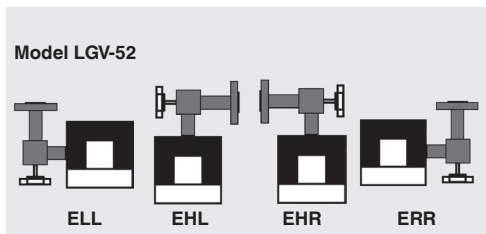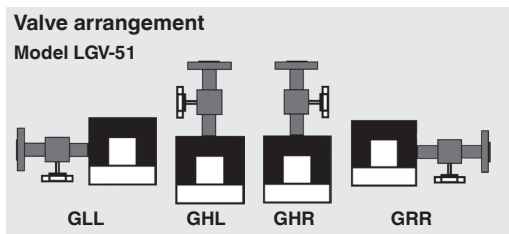

# Glass level gauge, transparent, weld-in version Model LGG-WT

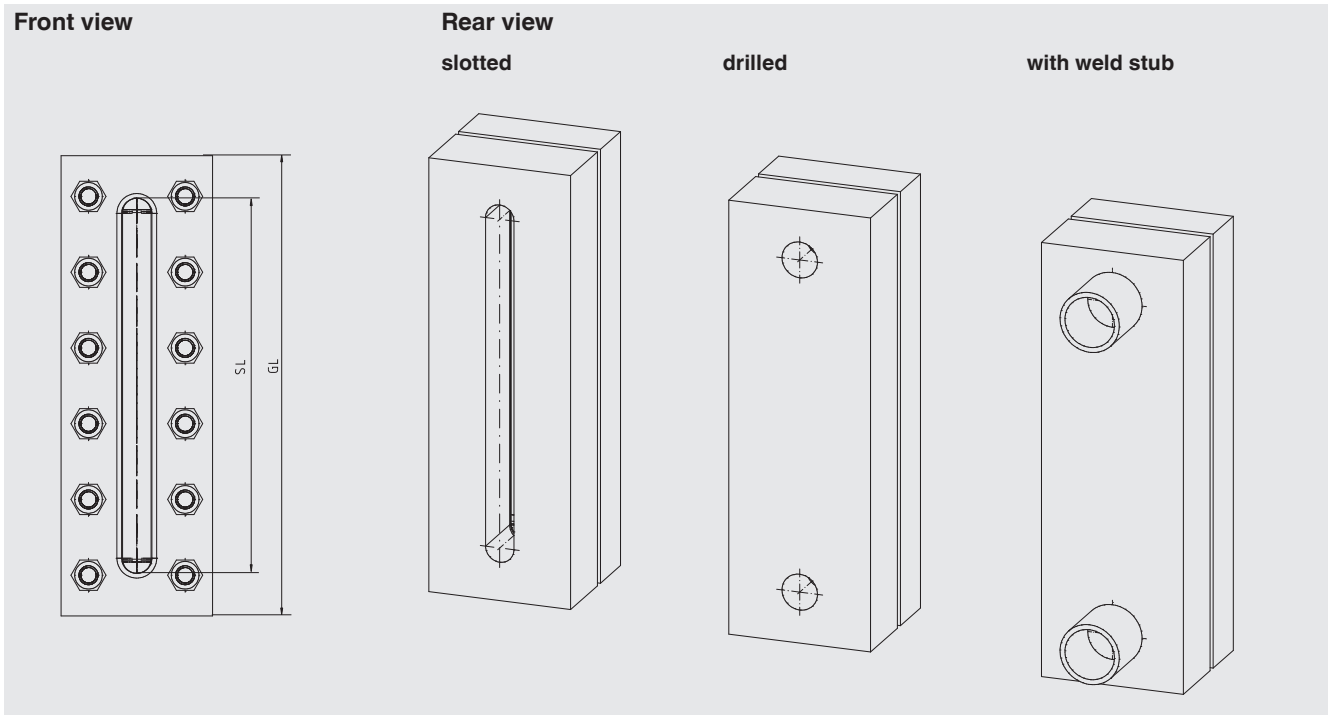


Specifications	Steel version	Stainless steel version
<b>Material</b>	Steel 1.0570, A350 LF2	Stainless steel 1.4404 (316L)
	Other materials on request	
<b>Gauge body</b>	80 x 40 mm [3.1 x 1.6 in]	
<b>Cover</b>	80 x 30 mm [3.1 x 1.2 in]	80 x 30 mm [3.1 x 1.2 in]
<b>Sight glass</b>	Borosilicate, transparent per DIN 7081 (option: Mica design)	
<b>Max. operating pressure</b>	40 bar [580.2 psi] <sup>1)</sup> (indicator must be included in the pressure test for the vessel)	
<b>Temperature range</b>	-10 ... +243 °C [-14 ... +469.4 °F] <sup>2)</sup>	-196 ... +243 °C [-320.8 ... +469.4 °F] <sup>2)</sup>
	-10 ... +300 °C [-14 ... +572 °F] <sup>3)</sup>	-196 ... +300 °C [-320.8 ... +572 °F] <sup>3)</sup>
	-10 ... +300 °C [-14 ... +572 °F]	-196 ... +300 °C [-320.8 ... +572 °F]
<b>Overall length GL</b>	Visible length SL + 43 mm [1.7 in]	
<b>Glass size</b>	2 ... 9 (larger on request)	
<b>Number of segments</b>	1	

1) Depending on the temperature, the material properties must be observed

2) Steam, without mica design

3) Steam, with mica design


# Glass level gauge, glass tube, standard version Model LGG-GA

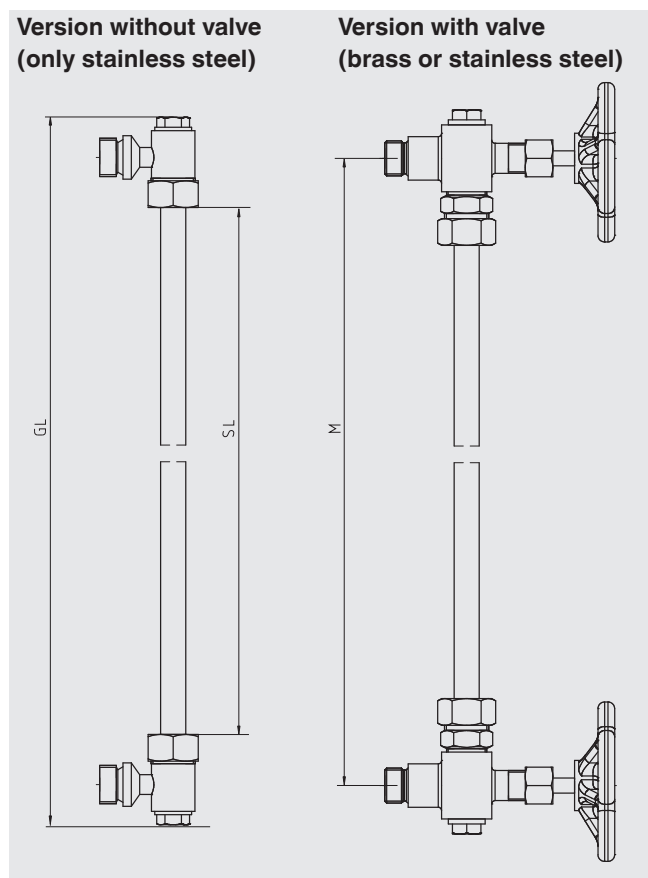

Specifications	Version without valve	Version with valve
<b>Material</b>	Stainless steel 1.4571 Other materials on request	Stainless steel 1.4571 or brass 2.0401
<b>Sight glass</b>	Glass tube, borosilicate, diameter 13 mm [0.5 in]	
<b>Max. operating pressure</b>	10 bar [145 psi] <sup>1)</sup>	
<b>Temperature range</b>	-10 ... +80 °C [+14 ... 176 °F] (with plexi protective cover) -10 ... +150 °C [+14 ... 302 °F]	-10 ... +200 °C [+14 ... 392 °F]
<b>Process connections</b>	<ul style="list-style-type: none"> <li>■ Male thread G ½</li> <li>■ Flange DIN EN 1092-1 DN 15 ... DN 50, PN 16 ... 40</li> <li>■ Flange ASME 16.5: ½ ... 2", Class 150 ... 300</li> </ul>	
<b>Centre-to-centre distance M</b>	110 ... 1,200 mm [4.3 ... 47.2 in] Visible length SL + 70 mm [2.8 in]	150 ... 1,200 mm [5.9 ... 47.2 in] Visible length SL + 110 mm [4.3 in]
<b>Vent</b>	Plug G ¾	Plug G 3/8
<b>Drain</b>	Plug G ¾	1.4571: Plug G ¾ , 2.0401: Plug G 1/4
<b>Glass size</b>	Centre-to-centre distance M - 20 mm [0.78 in]	Centre-to-centre distance M - 65 mm [2.6 in]
<b>Number of segments</b>	1	
<b>Suitable valve heads</b>		
Glass tube fitting	Model LGV-04	Model LGV-05

1) Depending on the temperature, the material properties must be observed


## Glass level gauge, glass tube, for large lengths with interposing glass-holder Model LGG-GB

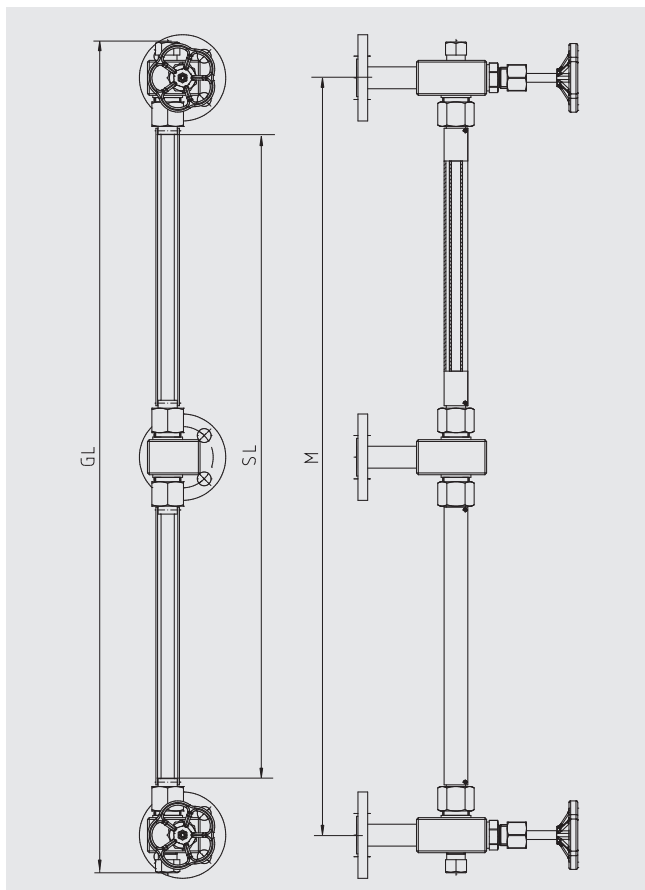

Specifications	
<b>Material</b>	Stainless steel 1.4571(316Ti)
	Other materials on request
<b>Sight glass</b>	Glass tube, borosilicate, diameter 16 mm [0.6 in]
<b>Max. operating pressure</b>	25 bar [362.6 psi] <sup>1)</sup>
<b>Temperature range</b>	-10 ... +200 °C [+14 ... 392 °F]
<b>Process connections</b>	<ul style="list-style-type: none"> <li>■ Male thread G ½, ½ NPT</li> <li>■ Flange DIN EN 1092-1 DN 15 ... DN 50, PN 16 ... 40</li> <li>■ Flange ASME 16.5: ½ ... 2", Class 150 ... 300</li> </ul>
<b>Centre-to-centre distance M</b>	150 ... 4,500 mm [5.9 ... 177.2 in], visible length SL + 130 mm [5.1 in]
<b>Vent</b>	Plug
<b>Drain</b>	Plug
<b>Glass size</b>	150 ... 4,500 mm [5.9 ... 177.2 in] (use interposing gauge body from 1,500 mm [59.1 in])
<b>Number of segments</b>	1 ... 3
<b>Suitable valve heads</b>	
Handwheel	Model LGV-01
Quick closing lever	Model LGV-03

1) Depending on the temperature, the material properties must be observed

# Glass level gauge, refraction, highest-pressure version Model LGG-M

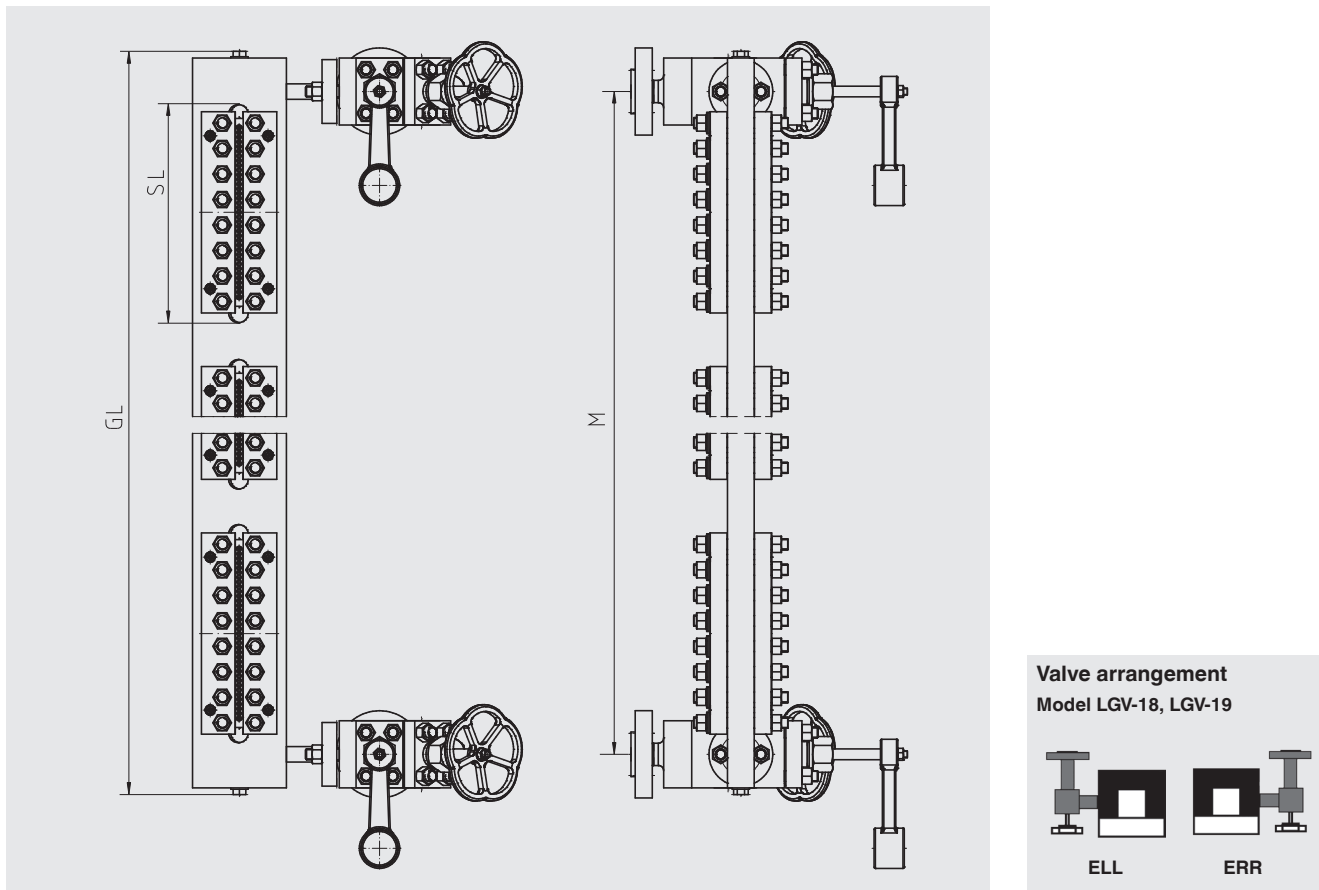


Specifications	
<b>Material</b>	Steel 1.5415 (15Mo3)
	Other materials on request
<b>Gauge body</b>	200 x 40 mm [5.5 x 1.6 in]
<b>Cover</b>	Pressure frame
<b>Sight glass</b>	Mica package (sight glass separation 120 mm [4.7 in])
<b>Max. operating pressure</b>	250 bar [3625.9 psi] <sup>1)</sup>
<b>Temperature range</b>	-10 ... +374 °C [+14 ... 705.2 °F]
<b>Process connections</b>	<ul style="list-style-type: none"> <li>■ Flange DIN EN 1092-1: DN 15 ... 50, PN 16 ... 250</li> <li>■ Flange ASME 16.5: ½ ... 2", Class 150 ... 2,500</li> </ul>
<b>Centre-to-centre distance M</b>	Freely selectable, min. visible length SL + 80 mm [3.1 in]
<b>Vent</b>	Plug G ½ (option: Weld stub, flange, valve or ball valve)
<b>Drain</b>	Plug G ½ (option: Weld stub, flange, valve or ball valve)
<b>Glass size</b>	2 ... 11
<b>Number of segments</b>	1 ... 9
<b>Suitable valve heads</b>	
Handwheel and quick closing lever	<ul style="list-style-type: none"> <li>■ Model LGV-18 (PN 160)</li> <li>■ Model LGV-19 (PN 250)</li> </ul>

1) Depending on the temperature, the material properties must be observed

## Valve heads

### Model LGV-01

#### Glass tube fitting with handwheel

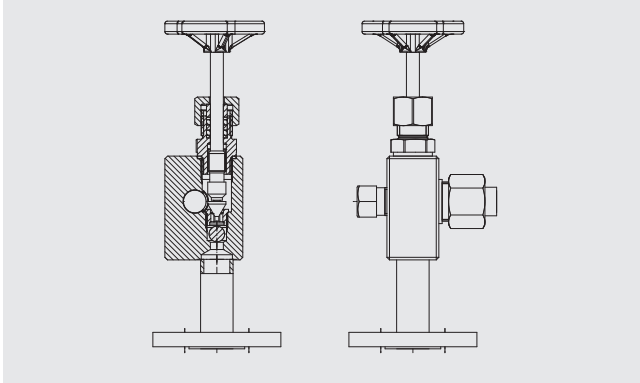

#### Specifications

##### Materials

Valve body	Stainless steel
Head piece	Stainless steel

<b>Construction</b>	Machined
---------------------	----------

<b>Pressure range</b>	PN 25
-----------------------	-------

<b>Operation</b>	Handwheel
------------------	-----------

<b>Mount</b>	Top/bottom
--------------	------------

<b>Connection to gauge body</b>	Glass tube 16
---------------------------------	---------------

<b>Rotatable</b>	Yes
------------------	-----

<b>Thruway</b>	Offset
----------------	--------

<b>Seat position</b>	Inline
----------------------	--------


<b>Valve stem thread</b>	Internal
--------------------------	----------

<b>Drain</b>	Yes
--------------	-----

<b>Ball-check valve</b>	Yes
-------------------------	-----

### Model LGV-03

#### Glass tube fitting with quick closing lever

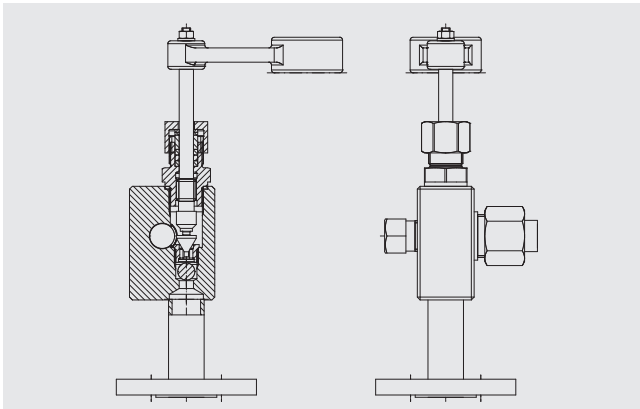

#### Specifications

##### Materials

Valve body	Stainless steel
Head piece	Stainless steel

<b>Construction</b>	Machined
---------------------	----------

<b>Pressure range</b>	PN 25
-----------------------	-------

<b>Operation</b>	Quick closing lever
------------------	---------------------

<b>Mount</b>	Top/bottom
--------------	------------

<b>Connection to gauge body</b>	Glass tube 16
---------------------------------	---------------

<b>Rotatable</b>	Yes
------------------	-----

<b>Thruway</b>	Offset
----------------	--------

<b>Seat position</b>	Inline
----------------------	--------


<b>Valve stem thread</b>	Internal
--------------------------	----------

<b>Drain</b>	Yes
--------------	-----

<b>Ball-check valve</b>	Yes
-------------------------	-----

### Model LGV-04

#### Compact glass tube fitting without valve

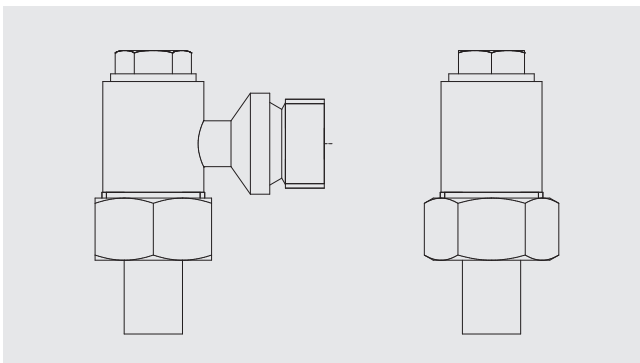

#### Specifications

<b>Valve body material</b>	Stainless steel 1.4571
----------------------------	------------------------

<b>Construction</b>	Weld-in
---------------------	---------

<b>Pressure range</b>	PN 25
-----------------------	-------

<b>Operation</b>	Without
------------------	---------

<b>Mount</b>	Top/bottom
--------------	------------

<b>Connection to gauge body</b>	Glass tube 13.5
---------------------------------	-----------------

<b>Rotatable</b>	Yes
------------------	-----

<b>Thruway</b>	Angled
----------------	--------


<b>Seat position</b>	Without
----------------------	---------

<b>Valve stem thread</b>	Without
--------------------------	---------

<b>Drain</b>	Yes, G 3/8
--------------	------------


<b>Ball-check valve</b>	No
-------------------------	----

**Model LGV-05**  
**Compact glass tube fitting with handwheel**

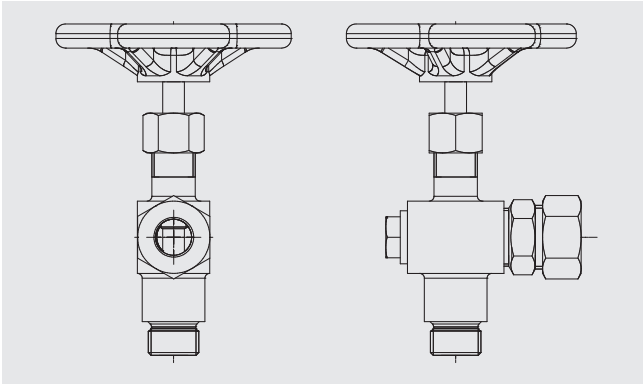


Specifications	
<b>Materials</b>	
Valve body	<ul style="list-style-type: none"> <li>■ Brass 2.0401</li> <li>■ Stainless steel 1.4571</li> </ul>
Head piece	Stainless steel
<b>Construction</b>	Machined
<b>Pressure range</b>	PN 10
<b>Operation</b>	Handwheel
<b>Mount</b>	Top/bottom
<b>Connection to gauge body</b>	Glass tube 13.5
<b>Rotatable</b>	Yes
<b>Thruway</b>	Angled
<b>Seat position</b>	Inline
<b>Valve stem thread</b>	Internal
<b>Drain</b>	Yes, 1.4571: G 3/8, 2.0401: G 1/4
<b>Ball-check valve</b>	No

**Model LGV-18**  
**Double valve**

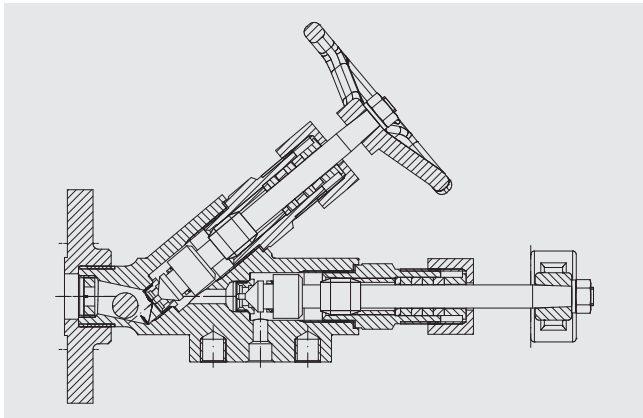


Specifications	
<b>Materials</b>	
Valve body	Steel 15Mo3
Head piece	Stainless steel
<b>Construction</b>	Forged
<b>Pressure range</b>	PN 160
<b>Operation</b>	Double handwheel/double lever
<b>Mount</b>	Lateral
<b>Connection to gauge body</b>	Flanged
<b>Rotatable</b>	No
<b>Thruway</b>	Angled
<b>Seat position</b>	Inline
<b>Valve stem thread</b>	Internal
<b>Drain</b>	No
<b>Ball-check valve</b>	Yes

**Model LGV-19**  
**Double valve, high pressure**

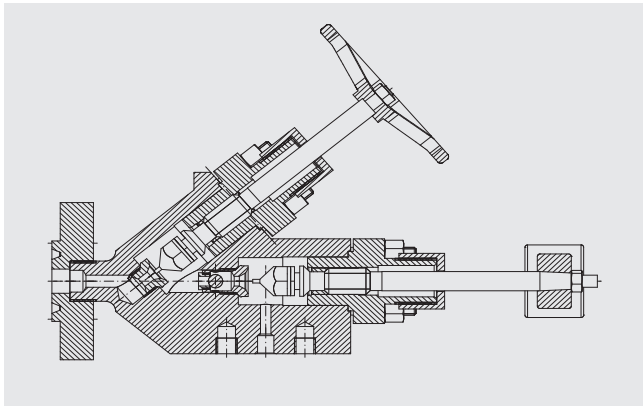


Specifications	
<b>Materials</b>	
Valve body	Steel 15Mo3
Head piece	Stainless steel
<b>Construction</b>	Machined
<b>Pressure range</b>	PN 250
<b>Operation</b>	Double handwheel/double lever
<b>Mount</b>	Lateral
<b>Connection to gauge body</b>	Flanged
<b>Rotatable</b>	No
<b>Thruway</b>	Angled
<b>Seat position</b>	Inline
<b>Valve stem thread</b>	Internal
<b>Drain</b>	No
<b>Ball-check valve</b>	Yes

**Model LGV-33**  
**Forged valve with handwheel**

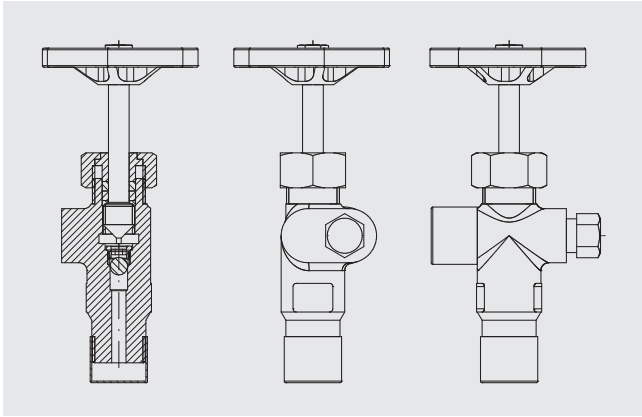


Specifications	
<b>Materials</b>	
Valve body	Steel A350 LF2
Head piece	Stainless steel
<b>Construction</b>	Forged
<b>Pressure range</b>	PN 250
<b>Operation</b>	Handwheel
<b>Mount</b>	Top/bottom
<b>Connection to gauge body</b>	Screwed nipple
<b>Rotatable</b>	Yes
<b>Thruway</b>	Offset
<b>Seat position</b>	Inline
<b>Valve stem thread</b>	Internal
<b>Drain</b>	Yes, 1/2 NPT
<b>Ball-check valve</b>	Yes

**Model LGV-51, straight valve with handwheel**

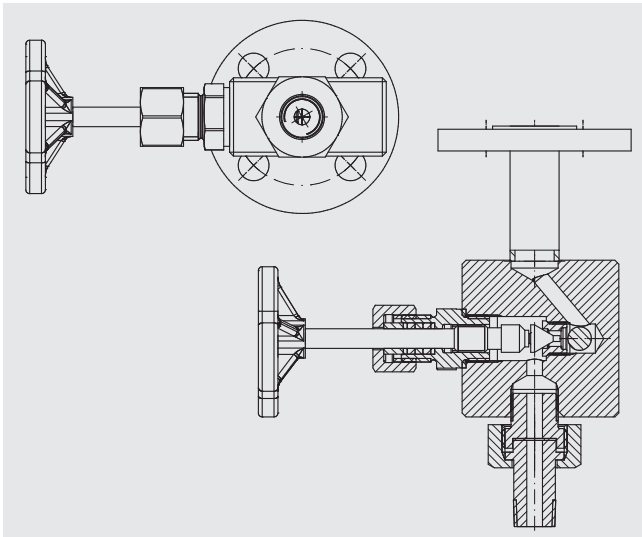

Specifications	
<b>Materials</b>	
Valve body	Steel, stainless steel
Head piece	Stainless steel
<b>Construction</b>	Machined
<b>Pressure range</b>	PN 250
<b>Operation</b>	Handwheel
<b>Mount</b>	Lateral/back
<b>Connection to gauge body</b>	Screwed nipple
<b>Rotatable</b>	No
<b>Thruway</b>	Straight
<b>Seat position</b>	Inline
<b>Valve stem thread</b>	Internal
<b>Drain</b>	No
<b>Ball-check valve</b>	Yes


**Model LGV-52**  
**Angled valve with handwheel**

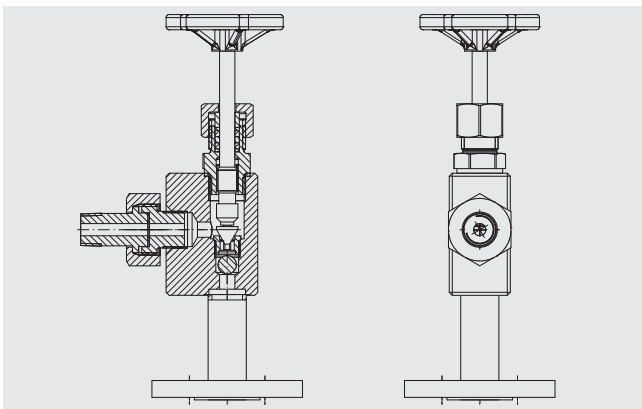

Specifications	
<b>Materials</b>	
Valve body	Steel, stainless steel
Head piece	Stainless steel
<b>Construction</b>	Machined
<b>Pressure range</b>	PN 250
<b>Operation</b>	Handwheel
<b>Mount</b>	Lateral
<b>Connection to gauge body</b>	Screwed nipple
<b>Rotatable</b>	No
<b>Thruway</b>	Angled
<b>Seat position</b>	Inline
<b>Valve stem thread</b>	Internal
<b>Drain</b>	No
<b>Ball-check valve</b>	Yes




**Model LGV-53**  
**Offset valve with handwheel**

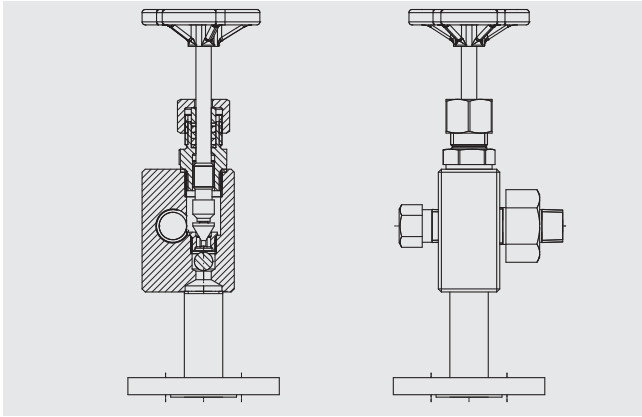


Specifications	
<b>Materials</b>	
Valve body	Steel, stainless steel
Head piece	Stainless steel
<b>Construction</b>	Machined
<b>Pressure range</b>	PN 250
<b>Operation</b>	Handwheel
<b>Mount</b>	Top/bottom
<b>Connection to gauge body</b>	Screwed nipple
<b>Rotatable</b>	Yes
<b>Thruway</b>	Offset
<b>Seat position</b>	Inline
<b>Valve stem thread</b>	Internal
<b>Drain</b>	Yes
<b>Ball-check valve</b>	Yes

**Model LGV-56**  
**straight valve with quick closing lever**

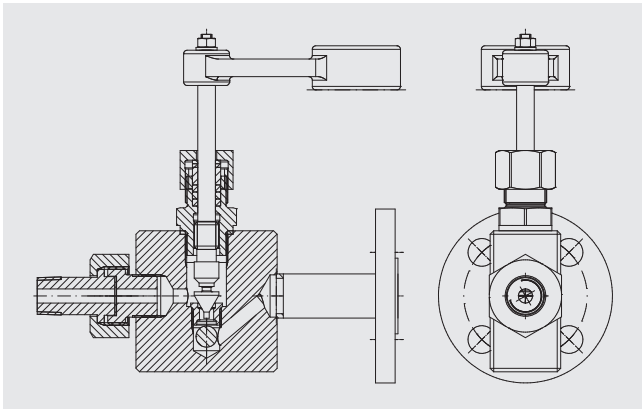


Specifications	
<b>Materials</b>	
Valve body	Steel, stainless steel
Head piece	Stainless steel
<b>Construction</b>	Machined
<b>Pressure range</b>	PN 100
<b>Operation</b>	Quick closing lever
<b>Mount</b>	Lateral/back
<b>Connection to gauge body</b>	Screwed nipple
<b>Rotatable</b>	No
<b>Thruway</b>	Straight
<b>Seat position</b>	Inline
<b>Valve stem thread</b>	Internal
<b>Drain</b>	No
<b>Ball-check valve</b>	Yes

**Model LGV-57**  
**Angled valve with quick closing lever**

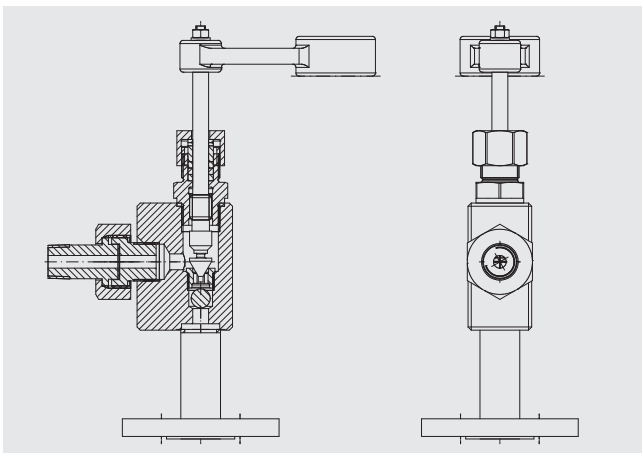


Specifications	
<b>Materials</b>	
Valve body	Steel, stainless steel
Head piece	Stainless steel
<b>Construction</b>	Machined
<b>Pressure range</b>	PN 100
<b>Operation</b>	Quick closing lever
<b>Mount</b>	Lateral
<b>Connection to gauge body</b>	Screwed nipple
<b>Rotatable</b>	No
<b>Thruway</b>	Angled
<b>Seat position</b>	Inline
<b>Valve stem thread</b>	Internal
<b>Drain</b>	No
<b>Ball-check valve</b>	Yes

**Model LGV-58**  
**Offset valve with quick closing lever**

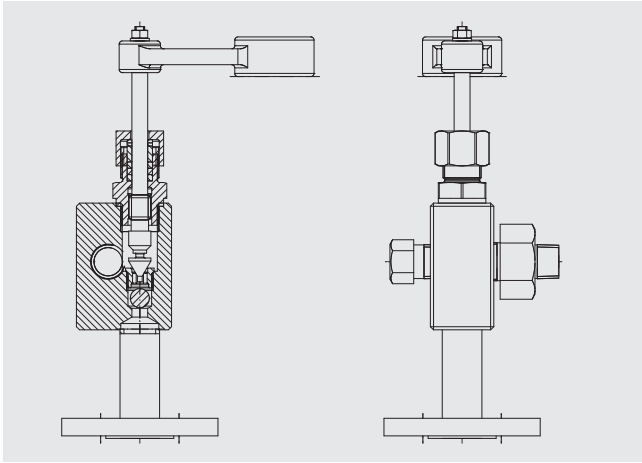


Specifications	
<b>Materials</b>	
Valve body	Steel, stainless steel
Head piece	Stainless steel
<b>Construction</b>	Machined
<b>Pressure range</b>	PN 100
<b>Operation</b>	Quick closing lever
<b>Mount</b>	Top/bottom
<b>Connection to gauge body</b>	Screwed nipple
<b>Rotatable</b>	Yes
<b>Thruway</b>	Offset
<b>Seat position</b>	Inline
<b>Valve stem thread</b>	Internal
<b>Drain</b>	Yes
<b>Ball-check valve</b>	Yes

**Model LGV-71, straight valve with handwheel**

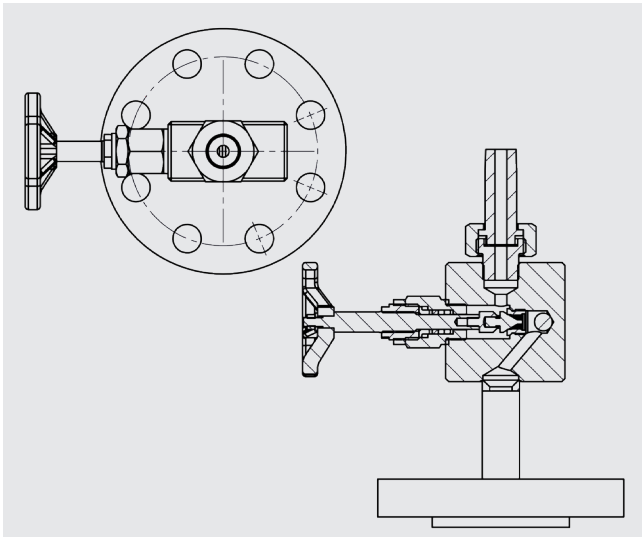


Specifications	
<b>Materials</b>	
Valve body	Steel, stainless steel
Head piece	Stainless steel
<b>Construction</b>	Machined
<b>Pressure range</b>	PN 250
<b>Operation</b>	Handwheel
<b>Mount</b>	Lateral/back
<b>Connection to gauge body</b>	Screwed nipple
<b>Rotatable</b>	No
<b>Thruway</b>	Straight
<b>Seat position</b>	Inline
<b>Valve stem thread</b>	External
<b>Drain</b>	No
<b>Ball-check valve</b>	Yes

**Model LGV-72**  
**Angled valve with handwheel**

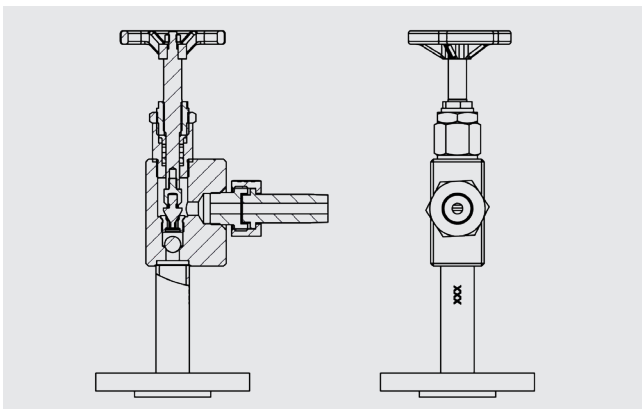

Specifications	
<b>Materials</b>	
Valve body	Steel, stainless steel
Head piece	Stainless steel
<b>Construction</b>	Machined
<b>Pressure range</b>	PN 250
<b>Operation</b>	Handwheel
<b>Mount</b>	Lateral
<b>Connection to gauge body</b>	Screwed nipple
<b>Rotatable</b>	No
<b>Thruway</b>	Angled
<b>Seat position</b>	Inline
<b>Valve stem thread</b>	External
<b>Drain</b>	No
<b>Ball-check valve</b>	Yes

**Model LGV-73**  
**Offset valve with handwheel**

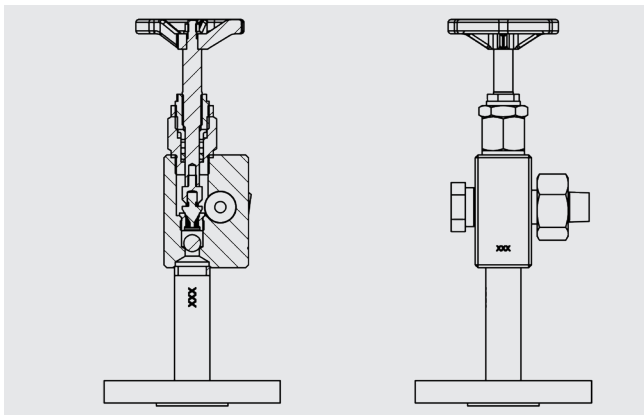


<b>Specifications</b>	
<b>Materials</b>	
Valve body	Steel, stainless steel
Head piece	Stainless steel
<b>Construction</b>	Machined
<b>Pressure range</b>	PN 250
<b>Operation</b>	Handwheel
<b>Mount</b>	Top/bottom
<b>Connection to gauge body</b>	Screwed nipple
<b>Rotatable</b>	Yes
<b>Thruway</b>	Offset
<b>Seat position</b>	Inline
<b>Valve stem thread</b>	External
<b>Drain</b>	Yes
<b>Ball-check valve</b>	Yes

## Spare parts


Name	Description	Order number
<b>Glass set Rx</b>	<b>1 x sight glass reflex borosilicate size x</b> <b>1 x flat gasket size x</b> <b>1 x cushion size x</b>	
Glass set R2	Size 2 (140 x 34 x 17 mm [5.5 x 1.3 x 0.7 in])	119442
Glass set R3	Size 3 (165 x 34 x 17 mm [6.5 x 1.3 x 0.7 in])	119444
Glass set R4	Size 4 (190 x 34 x 17 mm [7.5 x 1.3 x 0.7 in])	119446
Glass set R5	Size 5 (220 x 34 x 17 mm [8.7 x 1.3 x 0.7 in])	119447
Glass set R6	Size 6 (250 x 34 x 17 mm [9.8 x 1.3 x 0.7 in])	119448
Glass set R7	Size 7 (280 x 34 x 17 mm [11.0 x 1.3 x 0.7 in])	119450
Glass set R8	Size 8 (320 x 34 x 17 mm [12.6 x 1.3 x 0.7 in])	119451
Glass set R9	Size 9 (340 x 34 x 17 mm [13.4 x 1.3 x 0.7 in])	119452
Glass set R10	Size 10 (370 x 34 x 17 mm [14.6 x 1.3 x 0.7 in])	119453
Glass set R11	Size 11 (400 x 34 x 17 mm [15.7 x 1.3 x 0.7 in])	119454
<b>Glass set Tx</b>	<b>1 x sight glass transparent borosilicate size x</b> <b>1 x flat gasket size x</b> <b>1 x cushion size x</b>	
Glass set T2	Size 2 (140 x 34 x 17 mm [5.5 x 1.3 x 0.7 in])	119477
Glass set T3	Size 3 (165 x 34 x 17 mm [6.5 x 1.3 x 0.7 in])	119476
Glass set T4	Size 4 (190 x 34 x 17 mm [7.5 x 1.3 x 0.7 in])	119475
Glass set T5	Size 5 (220 x 34 x 17 mm [8.7 x 1.3 x 0.7 in])	119473
Glass set T6	Size 6 (250 x 34 x 17 mm [9.8 x 1.3 x 0.7 in])	119472
Glass set T7	Size 7 (280 x 34 x 17 mm [11.0 x 1.3 x 0.7 in])	119467
Glass set T8	Size 8 (320 x 34 x 17 mm [12.6 x 1.3 x 0.7 in])	119465
Glass set T9	Size 9 (340 x 34 x 17 mm [13.4 x 1.3 x 0.7 in])	119462
Glass set T10	Size 10 (370 x 34 x 17 mm [14.6 x 1.3 x 0.7 in])	119456
Glass set T11	Size 11 (400 x 34 x 17 mm [15.7 x 1.3 x 0.7 in])	119455
<b>Glass protection</b>		
Glass protection M2	1 x mica shield size 2	501577
Glass protection M3	1 x mica shield size 3	501578
Glass protection M4	1 x mica shield size 4	501579
Glass protection M5	1 x mica shield size 5	501580
Glass protection M6	1 x mica shield size 6	501581
Glass protection M7	1 x mica shield size 7	501582
Glass protection M8	1 x mica shield size 8	501583
Glass protection M9	1 x mica shield size 9	501585
Glass protection M10	1 x mica shield size 10	501587
Glass protection M11	1 x mica shield size 11	501588
<b>Head piece</b>		
Head piece KS1	1 x head piece for LGG-E	503765
Head piece KS2	1 x head piece for valve model LGV-01, LGV-51, LGV-52, LGV-53	503923
Head piece KS3	1 x head piece for valve model LGV-03, LGV-56, LGV-57, LGV-58	503924
Head piece KS4	1 x head piece for valve model LGV-18 (handwheel, ball)	503619
Head piece KS5	1 x head piece for valve model LGV-18 (lever)	503620
Head piece KS6	1 x head piece for valve model LGV-19 (handwheel)	503621
Head piece KS7	1 x head piece for valve model LGV-19 (lever, ball)	503622
Head piece KS8	1x head piece for valve model LGV-71, LGV-72, LGV-73	14519914

## Accessories

Model	Description
 LGI	Illumination unit, for glass level gauge → See data sheet LM 33.02

### Acrylic glass extender


Using the acrylic glass extender, the sight glass can be insulated from low temperatures. The window is thus maintained through the insulation.

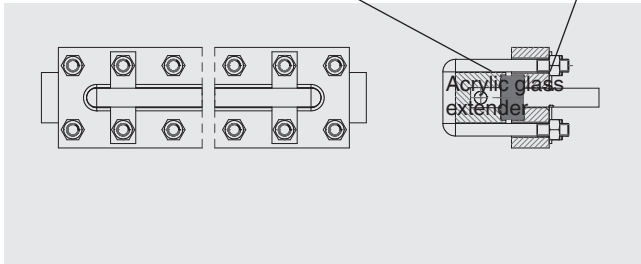

### Mark for low-water level

This low-water mark serves as a warning indicator for the operator. Form, size and lettering vary depending on the design of the water-level indicator.

The position of the low-water mark is always specified from the centre of the lower process connection.

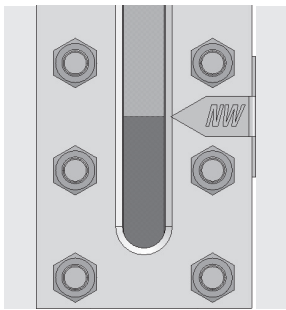

### Ordering information

To order the described product the order number (if available) is sufficient.

Alternatively:

Model / Version / Process connection / Centre-to-centre distance / Valve type / Valve head arrangement / Process specifications (operating temperature and pressure) / Options

© 10/2010 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.  
 The specifications given in this document represent the state of engineering at the time of publishing.  
 We reserve the right to make modifications to the specifications and materials.  
 In case of a different interpretation of the translated and the English data sheet, the English wording shall prevail.

