

# WACHENDORFF

The Encoder Experts




## PROFINET Absolute Encoders WDGA encoders fast and compact



[wachendorff-automation.com/profinet](http://wachendorff-automation.com/profinet)

# PROFI<sup>®</sup> NET

The world's fastest and most compact PROFINET encoder!  
Ready for the latest PLC technology  
Designed for smaller installation spaces  
High precision:  $\pm 0.0878^\circ$   
High dynamics: 50  $\mu$ s  
Programmable setting parameters

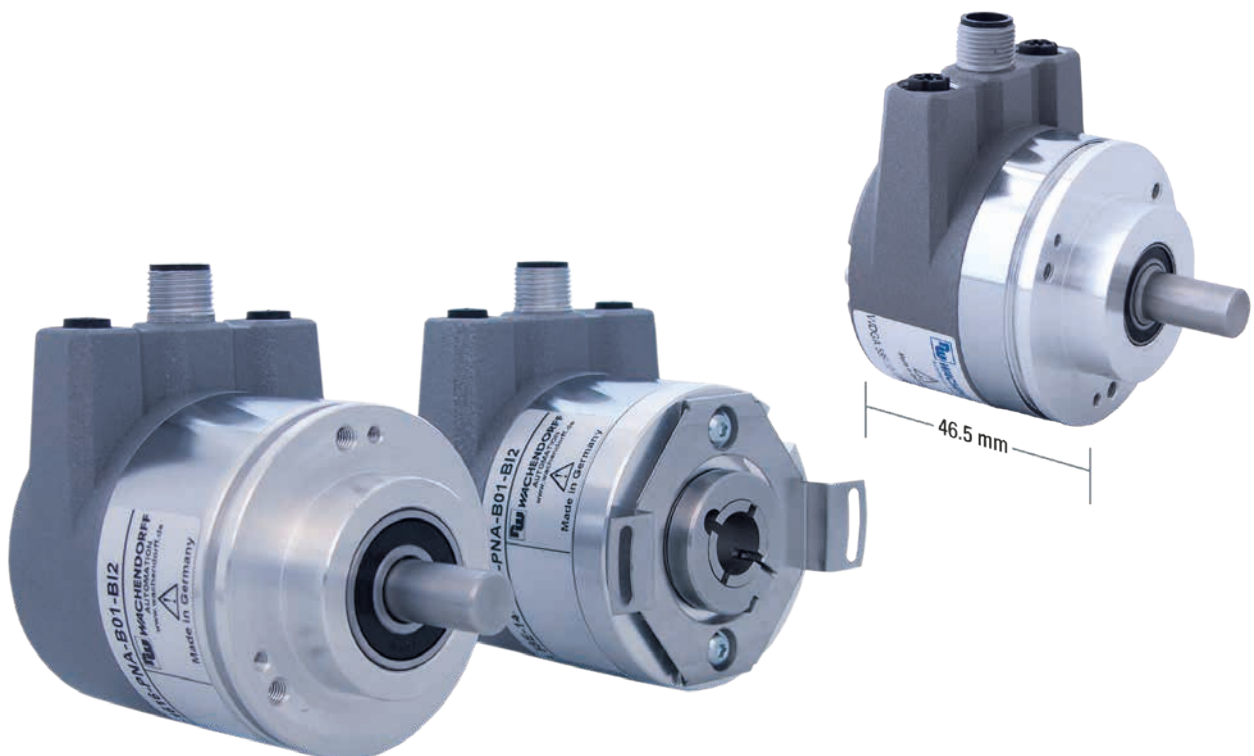

**Industrie ROBUST**

# PROFINET Absolute Encoders WDGA

## ... Fast and compact



Wachendorff Automation has developed and manufactured systems and encoders for over 30 years. These have been used in a variety of applications all over the world. More than 2,000 implemented customer solutions demonstrate our high level of flexibility. Our encoders and systems come with a 5-year warranty – which is unique worldwide.

**We have expanded our WDGA series of absolute encoders to include the industrial Ethernet interface PROFNET-IO.**

With our compact PROFNET WDGA58F encoder with bus cover, we have designed the world's smallest device for axial and radial direction. This saves you precious installation space. Extremely high load capacities ensure a long service life and reliable operation. In addition to the excellent mechanical properties, we have used the latest electronic components and most up-to-date communication profiles and encoder profiles.

Thanks to new high-precision and high-dynamic technologies, these extremely robust absolute encoders with magnetic scanning can now be used in areas where, until now, only absolute encoders with optical technology could be used.

### Single-turn with QuattroMag® technology

- Resolution up to 16 bit Single-turn
- Accuracy  $\pm 0.0878^\circ$  ( $\leq 12$  bit)
- Repeat accuracy  $\pm 0.0878^\circ$  ( $\leq 12$  bit)
- Internal dynamic of 50  $\mu$ s

### Multi-turn with EnDra® technology

- up to 43 bit Multi-turn
- no battery and no gear

Of course the PROFNET protocol includes not only standard functions but also extended parameters such as MRPD and MRP for automatic redundancy functions in the event of a fault.

Wachendorff is currently working on developing other Ethernet interfaces with all the advantages of the WDGA family.

### Technical Data:

**Types:** clamping flange / hollow shaft (blind-bored)

### Power supply/Current consumption:

10 VDC up to 32 VDC; typ. 125 mA

**Power consumption:** typ. 3 W

**Operating temperature:** -40 °C up to +85 °C, -40 °F up to +176°F

### Sensor data:

Single-turn: patented QuattroMag® technology

Single-turn resolution: up to 65,536 steps/360° (16 bit)

Single-turn accuracy:  $\pm 0.0878^\circ$  ( $\leq 12$  bit)

Single-turn repeat accuracy:  $\pm 0.0878^\circ$  ( $\leq 12$  bit)

Internal cycle time: 50  $\mu$ s

Multi-turn: patented EnDra® technology no battery and no gear.

Multi-turn resolution: up to 43 bit

### Interface: PROFNET IO (CC-C) V2.3

Device Profile: V4.2, Class 3, 4

Data Transfer: 100BASE-TX

Cycle time: 250  $\mu$ s, applicable for up to 125  $\mu$ s

Function: Multi-turn

Code: binary, CW default

### Programmable Parameter:

Steps per revolution, counts of revolution, preset, scale, counting direction, MRPD, MRP, LLDP, IRT

### Diagnostics: (LED)

Traffic and connection management:

L/A1: Port 1

L/A2: Port 2

### Status LED:

STAT, MOD: status of encoder and bus

**Any Questions?** Just call us at +49 (0) 67 22 / 99 65 414, send us an E-Mail to support-wa@wachendorff.de or call your local distributor: [www.wachendorff-automation.com/distri](http://www.wachendorff-automation.com/distri)

# WACHENDORFF

The Encoder Experts

Wachendorff Automation GmbH & Co. KG  
Industriestrasse 7 • D-65366 Geisenheim

Tel.: +49 (0) 67 22 / 99 65 - 25

E-Mail: wdg@wachendorff.de

[www.wachendorff-automation.com](http://www.wachendorff-automation.com)



2024

Your distributor: